
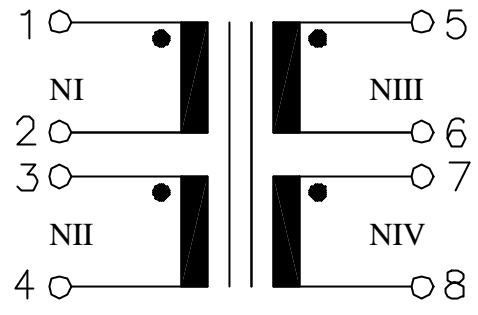


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21911S	U-Interface Transformer	A0	2005/13
<p>Characteristic data:</p> <p>f=60KHz</p> <p>RI+RII=17.0Ω(max.)</p> <p>RIII+RIV=13.0Ω(max.)</p> <p>Idc=40mA(max.)</p>		<p>Schematic Diagram:</p>  <p>Turns Ratio:1.5:1.5:1:1 (NI:NII:NIII:NIV)</p>	
<p>Electrical Specification at 25°C:</p> <ol style="list-style-type: none"> <li>LI+LII=27.0mH±8%,(NI+NII series),at 10KHz,100mV</li> <li>Polarity and turns ratio tolerance: ±2%</li> <li>Ck≤150pF,(NI    NII TO NIII    NIV),at 10KHz,100mV</li> <li>Ls I+II≤150uH,(NI+NII series , NIII+NIV shorted),at 100KHz,100mV</li> <li>HI-pot test: Up=2.0KVrms,(NI+NII to NIII+NIV)</li> </ol>			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm <span style="float: right;">Tolerances: ±0.2mm</span></p>			

E10-013-C

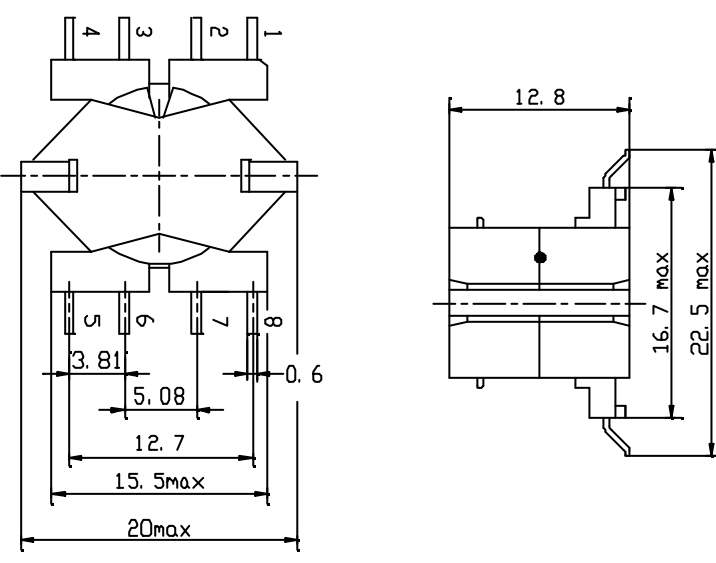

UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C