
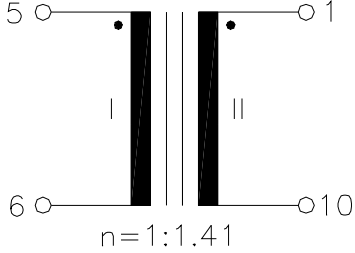


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28190	S _{2M} -Interface Transformer	A1	99/05
Characteristic data: $f=50\text{KHz}\dots 3.1\text{MHz}$ $R_I \approx 0.55\Omega$ $R_{II} \approx 0.8\Omega$ $T_u(\text{amb}) \leq 60^\circ\text{C}$		Schematic diagram: 	
Electrical Specification at 25 ⁰ C: 1.) $L_{II} \geq 4\text{mH}$, at 10KHz 100mV 2.) Polarity and turns ratio tolerance: $\pm 2\%$ 3.) $L_{sII} \leq 2.0\mu\text{H}$, (NI shorted), at 100KHz 100mV 4.) HI-pot test: $U_p = 3.0\text{KVrms}$, 2s (NI to NII)			
Dimension:  <p data-bbox="252 1899 1011 1933">NOTE: Specifications are subject to change without prior notice.</p> <p data-bbox="118 1951 268 1986">UNIT: mm</p> <p data-bbox="1177 1951 1445 1986">Tolerances: $\pm 0.2\text{mm}$</p>			

E10-013-C

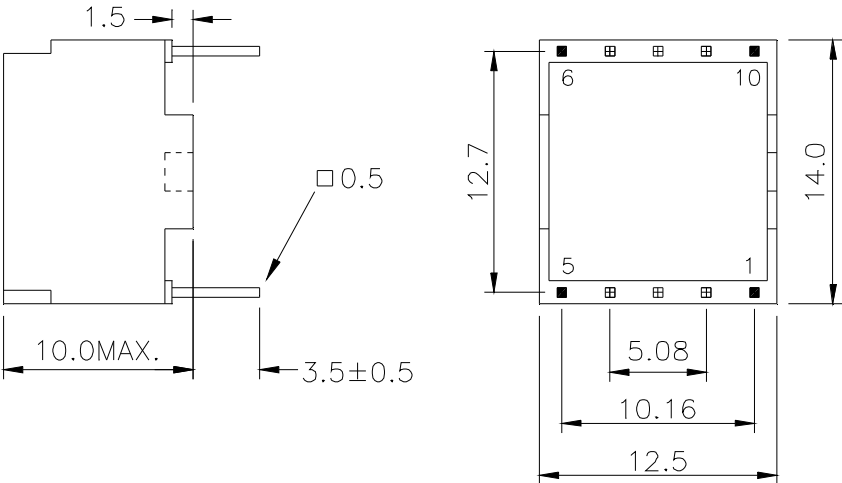

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C