



# DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT10536	RF TRANSFORMERS FOR CABLE MODEM	C0	01/01



## ELECTRICAL SPECIFICATIONS AT 25 °C :

1. TURNS RATIO : 1:2CT±2%, AT 15.75KHz 1Vrms, PIN(4-6):(1-3)
2. INSERTION LOSS : 1dB MAX., AT 3-70MHz
3. INSERTION LOSS : 2dB MAX., AT 2-270MHz
4. INSERTION LOSS : 3dB MAX., AT 1.5-300MHz

## DIMENSIONS & SCHEMATICS:

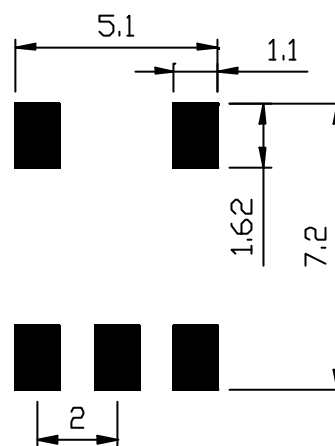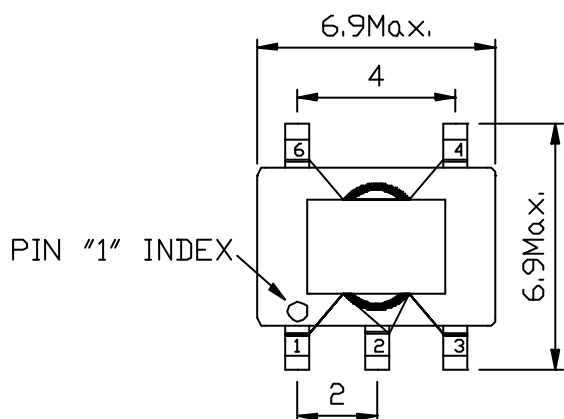

SUGGESTED P.C.B. LAYOUT

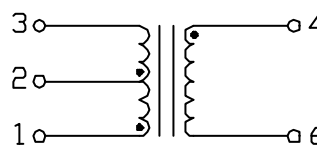

UNIT:mm

TOLERANCE:±0.3

- NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL  
 ACCORDING TO ITEM NO. "B632" OF DATA SHEET 01-00  
 2.Specifications are subject to change without prior notice.

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C