


HDSL

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20001	HDSL Transformer for Brooktree BT8960-416kbps	A1	2001/42

Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 2.0CS : 1CT $\pm 2\%$, Line side to Chip side .
- 2.) D.C.R : 2.2 Ω max. , PIN(9-8) .
2.2 Ω max. , PIN(7-6) .
2.2 Ω max. , PIN(2-4).
- 3.) Line side Inductance : 3.5mH $\pm 10\%$, at 10KHz 100mV, PIN(9-6) ; PIN(8-7) shorted .
- 4.) DC. Current : 70mA max .
- 5.) Leakage Inductance : 12uH max. , at 100KHz 100mV, PIN(9-6) ; PIN(2-3-4)&PIN(8-7) shorted.
- 6.) Longitudinal Balance : 55dB min. , at 104KHz .
- 7.) Return Loss : 16.5dB min. , 33KHz to 110KHz .
- 8.) Total Harmonic Distortion : -70dB typ. , at 100KHz 14dBm .
- 9.) HI-pot test : 1500Vac 2s , Line side to Chip side .
- 10.) Operating Temperature : -40°C to 85°C .

Schematic diagram & Dimension:

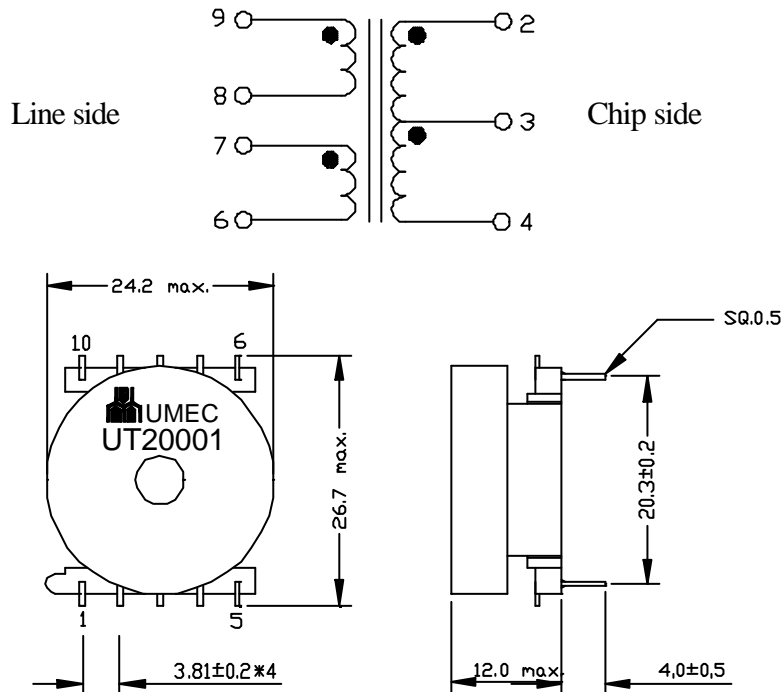

Note: Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ± 0.2 mm

E10-032-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C