


ADSL

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20130	ADSL TRANSFORMERS FOR LUCENT WILDWIRE CHIPSIGNAL BOOST APPLICATIONS	Preliminary	99/32

ELECTRICAL SPECIFICATIONS AT 25⁰C

1. INDUCTANCE : 10mHmin. AT 10KHz 100mV ,PIN(3-4)
2. LEAKAGE INDUCTANCE : 10 μ Hmax. AT 10KHz 100mV, PIN(3-4);(1-6)&(2-5) SHORTED
3. TURNS RATIO : 3.330:1 \pm 1% AT 15.75KHz 1V PIN(3-4):(1-5); PIN6,2 CONNECTED
4. HI-POT : 1250Vrms 0.5mA 1sec. BETWEEN WINDINGS
5. D.C.RESISTANCE : 1.25 ohms \pm 10%,PIN(3-4)
0.18 ohms \pm 10%,PIN(1-6)
0.21 ohms \pm 10%,PIN(2-5)

DIMENSIONS & SCHEMATICS

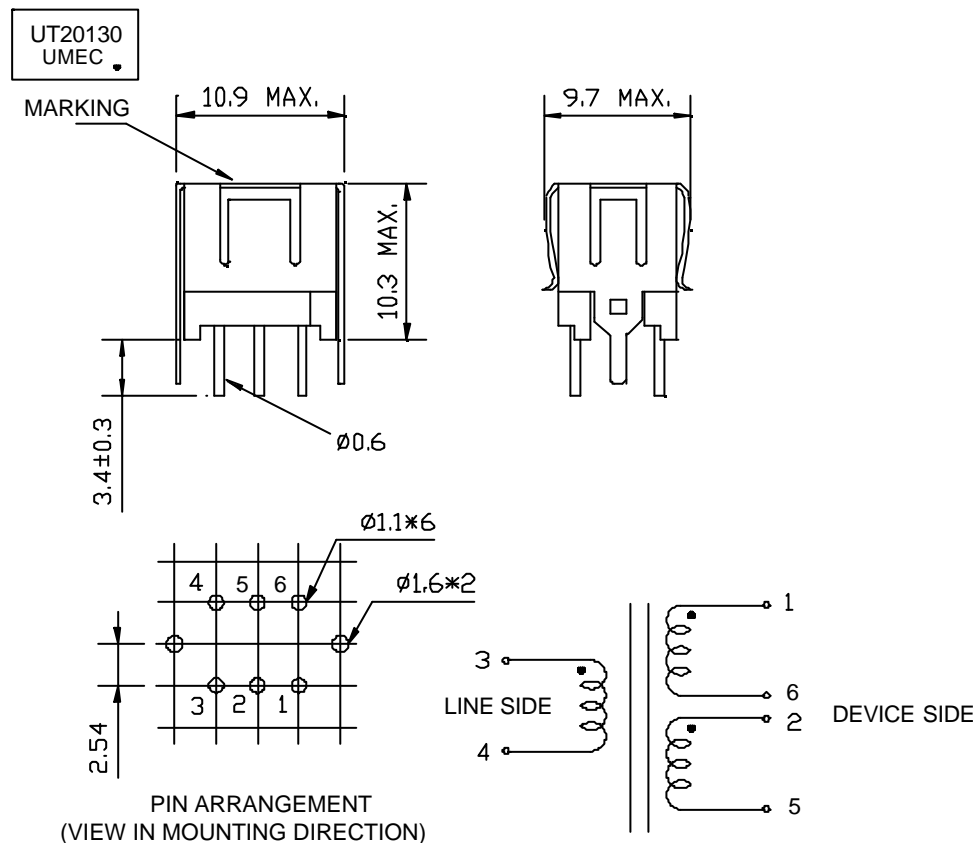

Note: Specifications are subject to change without prior notice.

UNIT : mm

E10-033-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C