


# DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT20169	90 $\mu$ H INDUCTOR	A1	05/53

## ELECTRICAL SPECIFICATIONS AT 25<sup>0</sup>C :

1. INDUCTANCE : 90 $\mu$ H $\pm$ 8% AT 1KHz 100mV , EACH WINDING
2. TURNS RATIO : 1:1  $\pm$ 1% , PIN(1-6): (2-5)
3. DC RESISTANCE : 3.0 $\Omega$  Max. , EACH WINDING
4. HI-POT : 600Vdc 0.5mA 1sec. , PIN1 to PIN2

## DIMENSIONS & SCHEMATICS :

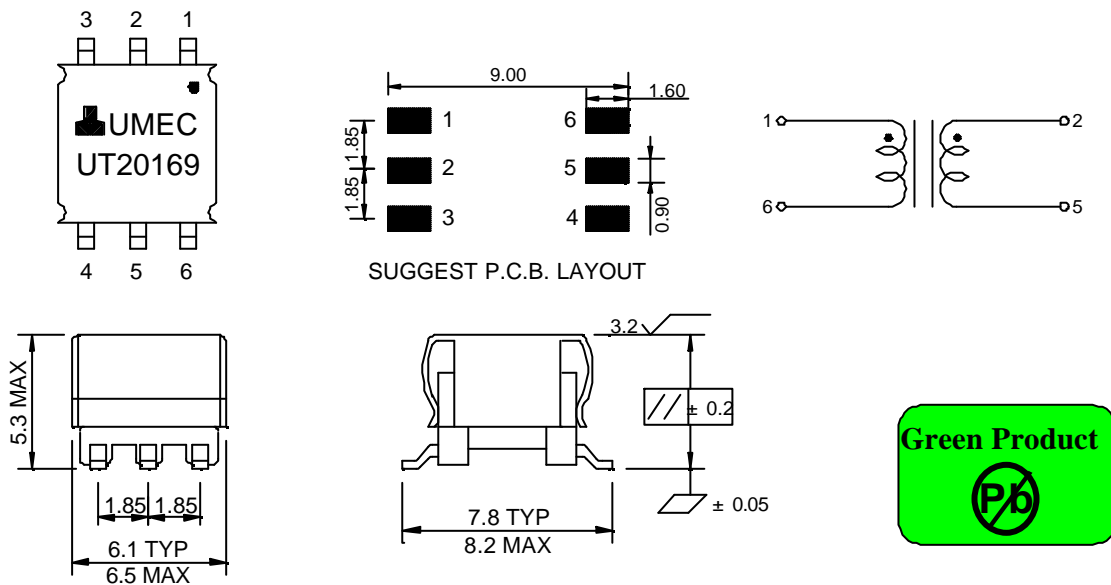

\*\*pin pitch to 1.  $\pm$  0.1mm

TOLERANCE:  $\pm$  0.1mm

NOTE : 1. Packaging Information-Tape And Reel According To Item No. "EE5S01" Of Data Sheet 01-00

2. For RoHS compliant products:

- a.) The UMEC ordering code: **TG-UT20169**
  - b.) Date Code suffix to "G" (xxxxG).
  - c.) Solder : Sn/Ag/Cu .
3. Specifications are subject to change without prior notice.

UNIT : mm



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C

E10-007-C