

ADSL



UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20321	ADSL Transformer	A2	2005/18

Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 2CS : 1CS $\pm 2\%$, Line side to Chip side.
- 2.) D.C.R. : 1.76 Ω max. , PIN(1-3-2-4) .
: 0.56 Ω max. , PIN(10-8-9-7) .
- 3.) Line side Inductance : 1.5mH $\pm 6\%$, at 10KHz 100mV, PIN(1-3-2-4)
- 4.) Leakage Inductance : 14.0uH max. ,at 100KHz 100mV, PIN(1-3-2-4) ; PIN(10-8-9-7) shorted
- 5.) Inerwinding Capacitance : 35pF max. at 100KHz 100mV , PIN(1-3-2-4) to PIN(10-8-9-7)
- 6.) Longitudinal Balance : 40dB min. , 30KHz~1.1MHz .
- 7.) T.H.D. : -90dB max. ,at 100KHz 2.5V .
- 8.) HI-pot test : 1500Vac 60s or 1875Vac 1s , Line side to Chip side .
- 9.) Operating Temperature : -40 to +85 °C

Note: The SABF series transformer meets the specifications for supplementary insulation per UL60950-1, CSA60950-1, IEC60950-1 with working voltage of 250V.

Schematic diagram & Dimension:

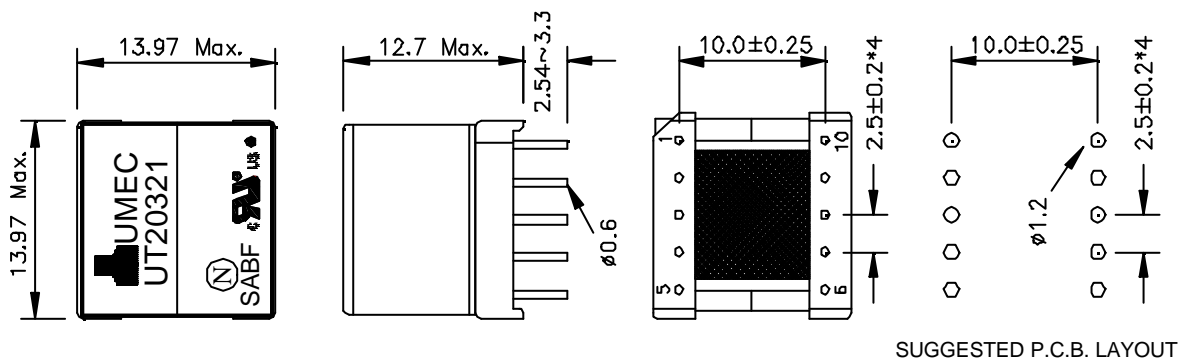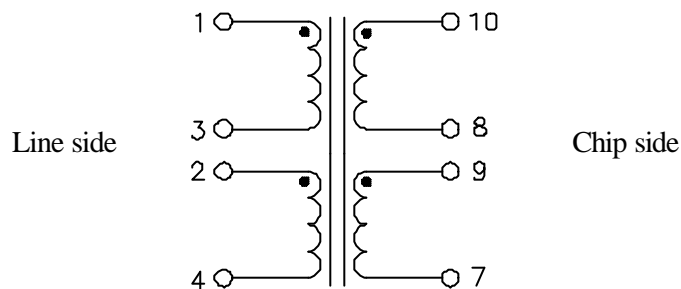

- NOTE : 1. For RoHS compliant products:
a.) The UMEC ordering code: **TG-UT20321**
b.) Date Code suffix to "G" (xxxxG).
c.) Solder : Sn/ Cu .
2. Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ± 0.2 mm

AGENCY APPROVALS

UL60950-1	: FILE NO. E212730	IEC60950-1	: CB Rrf. #DK-8600
CSA 60950-1 (via C-UL)	: FILE NO. E212730	Nordic, Japan, & Australia Deviations	: CB Rrf. #DK-8600
Nemko (EN60950-1)	: Certificate NO. P05203908		



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C

E10-033-C