


DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20328S	POTS, Line Transformer, EPX10 L-pin 2.5mm 1.00:2.49, 115mH @ 24mADC	F0	2004/15

Electrical specification at 25°C:

1. INDUCTANCE	115.0mH±7%, PIN(7-6) , 1kHz, 1Vac, Ls. 100.0mH min., PIN(7-6) , 1kHz, 1Vac, Ls, 24mADC at 0~70°C. 4.6mH±7%, PIN(1-3)&(2-4) , 1kHz, 1Vac, Ls.
2. LEAKAGE INDUCTANCE	300µH max., PIN(1-4) (tie 2-3,7-6), 15KHz, 100mVac, Ls.
3. TURNS RATIO	2.49 : 1.00±1%, PIN(7-6):(1-4) (tie 2-3), 15.75kHz, 1Vac.
4. DC RESISTANCE	10.5Ω±5%, PIN(1-3)&(2-4) . 33.5Ω±6%, PIN(7-6). ±0.30 ohms, resistive match, PIN(1-3)-(2-4).
5. HI-POT:	1000Vdc 1s 500µA , PIN 1 to 7 (tie 2-3),
6.INTERWINDING CAPACITANCE	100pF max., 10KHz 100mVac, PIN(1-2-3-4):(7-6) .

Schematic diagram & Dimension:

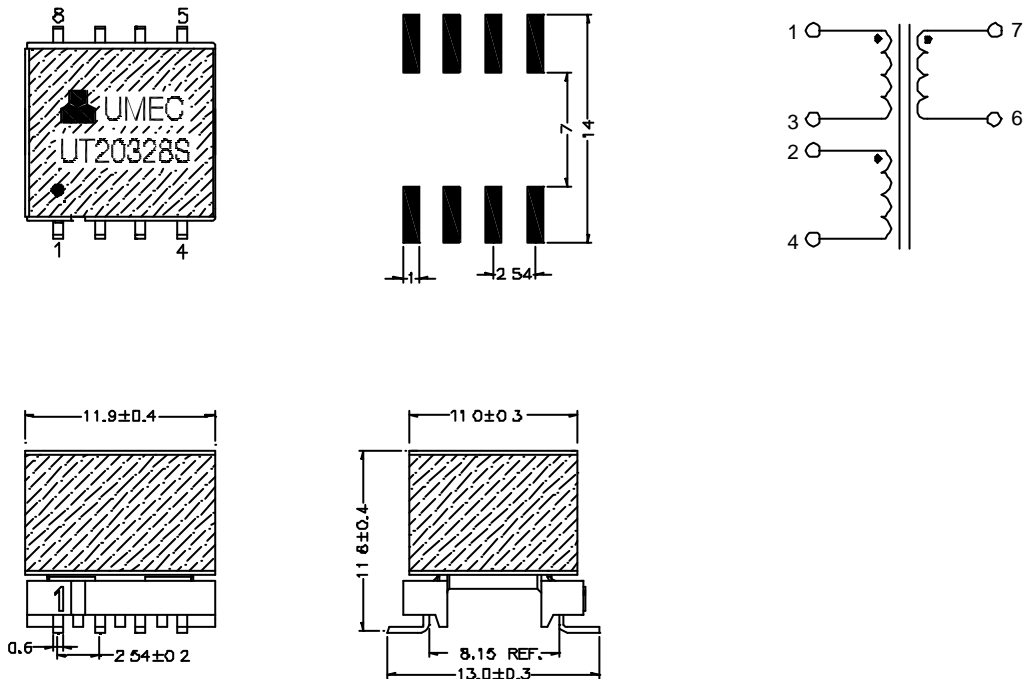

NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL
ACCORDING TO ITEM NO. "EPX10" OF DATA SHEET 01-00
2.Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ±0.2mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C

E10-007-C