

# ADSL


UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20339S	ADSL Transformer	A3	2005/18

### Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 0.92CS : 1CS ±2% , Line side to Chip side.
- 2.) D.C.R. : 0.690Ω ±10%, PIN(8-6) .  
: 0.690Ω ±10%, PIN(7-5) .  
: 0.56Ω ±10%, PIN(1-3) .  
: 0.660Ω ±10%, PIN(2-4) .
- 3.) Line side Inductance : 850uH ±10% , at 10KHz 100mV, PIN(1-4); PIN(3-2) shorted.
- 4.) Leakage Inductance : 5.0uH max. ,at 100KHz 100mV, PIN(1-4) ; PIN(2-3)&PIN(8-6-7-5) shorted.
- 5.) T.H.D. : -61.0dB max. ,at 10KHz 2V .
- 6.) HI-pot test : 1500Vac 60s or 1875Vac 1s , Line side to Chip side .
- 7.) Operating Temperature : -40 to +85 °C

**Note: The BECB series transformer meets the specifications for basic insulation per UL60950-1, CSA60950-1, EN60950-1, IEC60950-1 with working voltage of 250V.**

### Schematic diagram & Dimension:

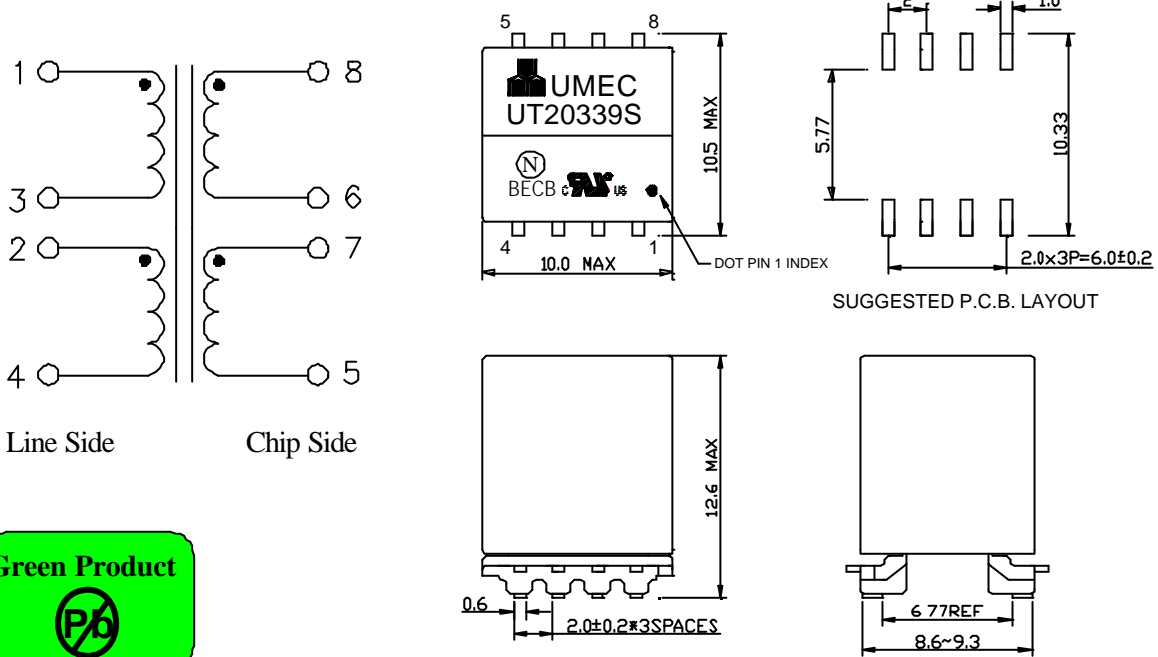

- NOTE : 1. Packaging Information: Tape and Reel according to Item NO. "TKH7J" of data sheet 01-00
2. For RoHS compliant products:
    - a.) The UMEC ordering code: **TG-UT20339S**
    - b.) Date Code suffix to "G" (xxxxG).
    - c.) Solder : Sn/Ag/Cu .
  3. Specifications are subject to change without prior notice.
  4. Patent Pending Core Type (USA and Foreign)

UNIT : mm

Tolerances : ±0.2mm

### AGENCY APPROVALS

UL60950-1	: FILE NO. E212730	IEC60950-1	: CB Rrf. #DK-8600
CSA 60950-1 (via C-UL)	: FILE NO. E212730	Nordic, Japan, & Australia Deviations	: CB Rrf. #DK-8600
Nemko (EN60950-1)	: Certificate NO. P05203901		



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C

E10-033-C