

SHDSL


UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20345S-A	SHDSL Transformer	A2	2005/18

Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 4.5 : 1 ±2% , PIN(1-3-2-4):(8-5) .
- 2.) D.C.R. : 7.00Ω max. , PIN(1-3-2-4) .
: 1.30Ω max. , PIN(8-5) .
- 3.) Inductance : 3.0mH ±10% , at 10KHz 100mV, PIN(1-3-2-4) .
- 4.) Leakage Inductance : 20uH max. ,at 100KHz 100mV,PIN(1-3-2-4) ; PIN(8-5) shorted .
- 5.) Cw/w : 40pF max. ,at 100KHz 100mV,PIN(1-3-2-4):(8-5) .
- 6.) T.H.D. : -74dB max. ,at 5KHz 4V (135:6.7ohms) .
- 7.) HI-pot test : 1500Vac 60s or 1875Vac 1s , PIN1&2 to 8 .

Note: The SICB series transformer meets the specifications for supplementary insulation per UL60950-1, CSA60950-1, EN60950-1, IEC60950-1 with working voltage of 250V.

Schematic diagram & Dimension:

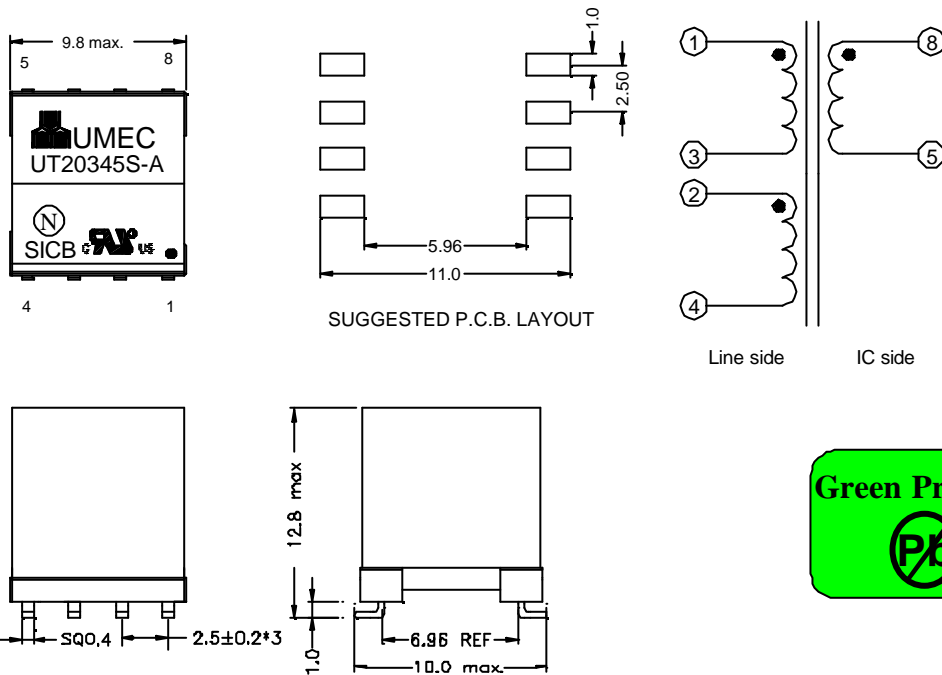

- NOTE : 1. Packaging Information: Tape and Reel according to Item NO. "AHT9L" of data sheet 01-00
 2. For RoHS compliant products:
 a.) The UMEC ordering code: **TG-UT20345S-A**
 b.) Date Code suffix to "G" (xxxxG).
 c.) Solder : Sn/Ag/Cu .
 3. Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ±0.2mm

AGENCY APPROVALS

UL60950-1	: FILE NO. E212730	IEC60950-1	: CB Rrf. #DK-8600
CSA 60950-1 (via C-UL)	: FILE NO. E212730	Nordic, Japan, & Australia Deviations	: CB Rrf. #DK-8600
Nemko (EN60950-1)	: Certificate NO. P05203901		



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-033-C