


DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20352A	EE5 SMD 28.0μH Inductor	A1	05/27

Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 1 : 1 ±2% , PIN(1-3):(4-6) using ungapped cores .
- 2.) D.C.R. : 0.90Ω max. , PIN(1-3).
: 0.90Ω max. , PIN(6-4).
- 3.) Inductance : 28.0μH±5% , at 10KHz 100mV, each winding .
- 4.) HI-pot test : 600Vdc 0.5mA 1s , PIN1 to 6.

Schematic diagram & Dimension:

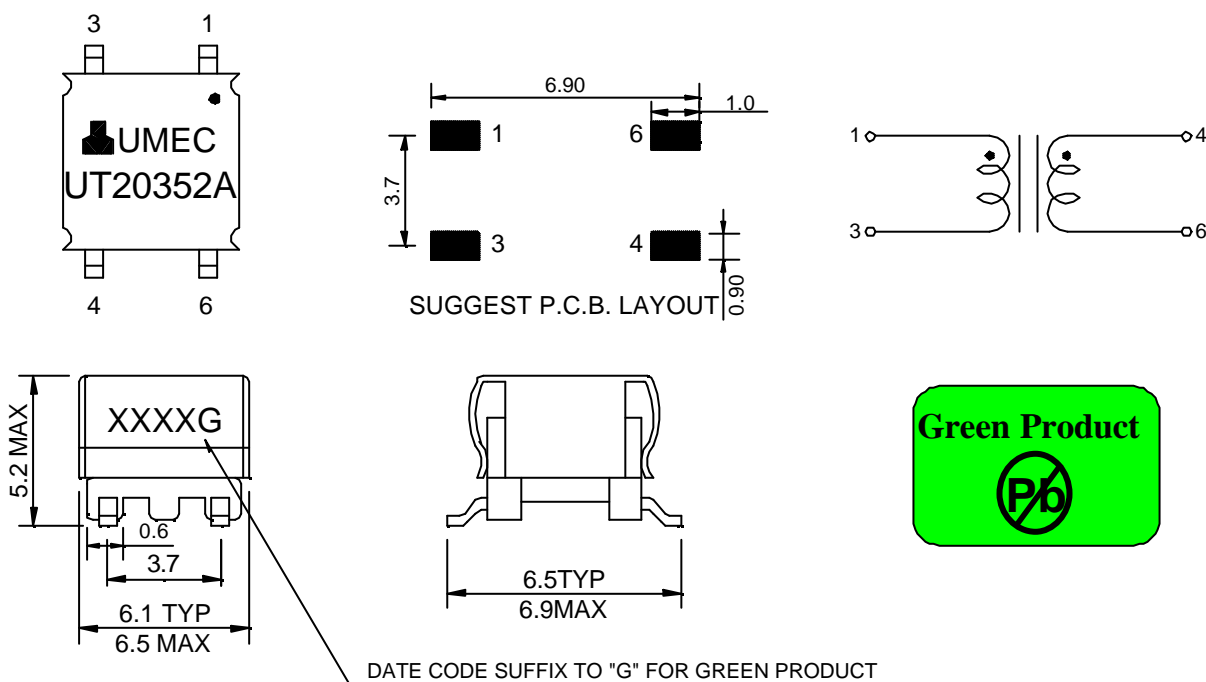

- NOTE : 1. Packaging Information: Tape and Reel according to Item NO. "EE5S04" of data sheet 01-00
2. For RoHS compliant products:
- a.) The UMEC ordering code: **TG-UT20352A**
 - b.) Date Code suffix to "G" (xxxxG).
 - c.) Solder : Sn/Ag/Cu .
3. Specifications are subject to change without prior notice.

UNIT : mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-007-C