

ADSL


UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20358S	1.39:1 TR 100μH EP7LA Line Interface Transformer	C2	2005/18

Electrical specification at 25°C:

- 1.) Turns Ratio and Polarity : 1.39 : 1.0 ±2% ,PIN(1-4):PIN(8-6) ; PIN(2-3) & PIN(7-5) connected .
- 2.) D.C.R. : 0.600Ω max. , PIN(1-3),(2-4) .
: 0.560Ω max. , PIN(8-5),(7-6) .
- 3.) Inductance : 100μH ±5% , at 10KHz 100mV, PIN(1-4) ; PIN(2-3) connected.
: 100μH ±6% , at 10KHz 100mV 120mA, PIN(1-4) ; PIN(2-3) connected.
- 4.) Leakage Inductance : 8.5μH max. ,at 100KHz 100mV,PIN(1-4) ; PIN(2-3)&PIN(5-6-7-8) connected.
- 5.) T.H.D. : -75dB max. , at 30KHz 3.15Vrms . Line : IC (100Ω:51.8Ω)
- 6.) HI-pot test : 1500Vac 0.5mA 60s or 1875Vac 0.5mA 1s, PIN(1-2-3-4) to PIN(5-6-7-8) .
: 500Vac 1s , PIN1 to PIN2 .
- 7.) Longitudinal Balance : 46dB min. at 1.1MHz .
- 8.) Operating Temperature : -40 to +85 °C

Note: The SFCA series transformer meets the specifications for supplementary insulation per UL60950-1, CSA60950-1, EN60950-1, IEC60950-1 with working voltage of 250V.

Schematic diagram & Dimension:

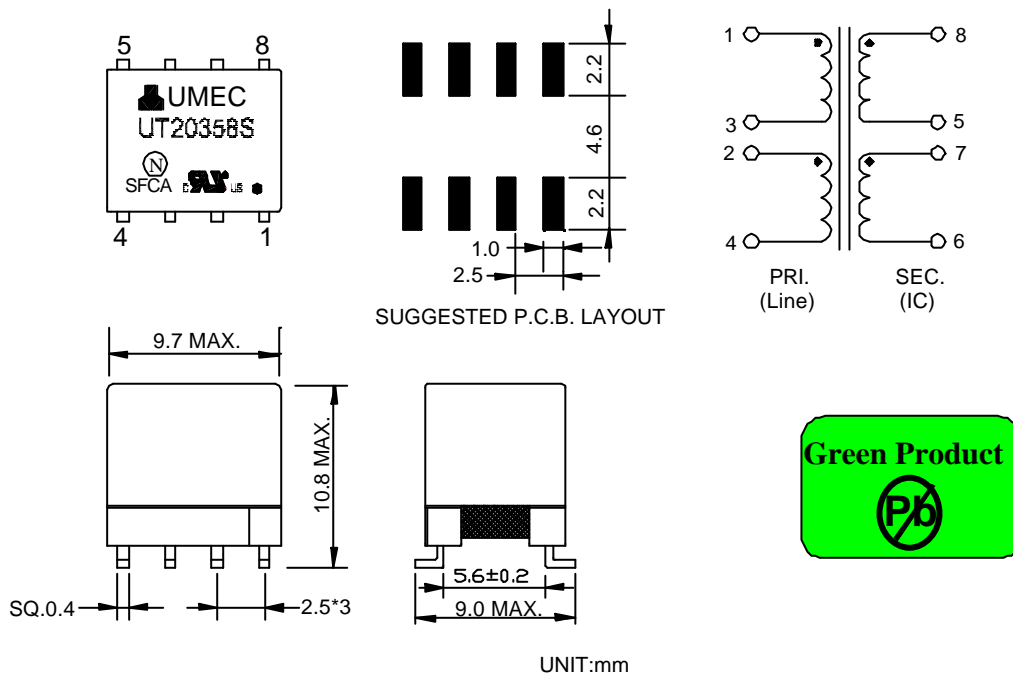

- NOTE : 1. Packaging Information: Tape and Reel according to Item NO.“EP7LA” of data sheet 01-00
 2. For RoHS compliant products:
 a.) The UMEC ordering code: **TG-UT20358S**
 b.) Date Code suffix to “G” (xxxxG).
 c.) Solder : Sn/Ag/Cu .
 3. Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ±0.2mm

AGENCY APPROVALS

UL60950-1	: FILE NO. E212730	IEC60950-1	: CB Rrf. #DK-8600
CSA 60950-1 (via C-UL)	: FILE NO. E212730	Nordic, Japan, &Australia Deviations	: CB Rrf. #DK-8600
Nemko (EN60950-1)	: Certificate NO. P05203901		



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-033-C