



DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20378	Transformer	A0	02/20

Electrical Specifications at 25 °C :

1. Turns ratios & Polarity: 1.25:1.25:1:1±2% AT 15.75KHz 1Vrms. PIN(1-2):(3-4):(6-5):(8-7)
2. Pri. inductance: 4.2mH±10% AT 10KHz 100mVrms. PIN(1-4), PIN2,3 Connected
3. Interwinding capacitance: 90pF Max. AT 100KHz 1Vrms. PIN(1-2-3-4):(8-7-6-5)
4. Pri. leakage inductance: 22uH Max. AT 100KHz 1Vrms. PIN(1-2-3-4):(8-7-6-5)Shorted
5. D.C.R: 2.9Ω Max. PIN(1-2-3-4)
2.3Ω Max. PIN(8-7-6-5)
6. Hi-pot: 2000Vrms/1sec. Leakage current 0.5mA Max. PIN(1-2-3-4)to(8-7-6-5)

Dimensions & Schematics:

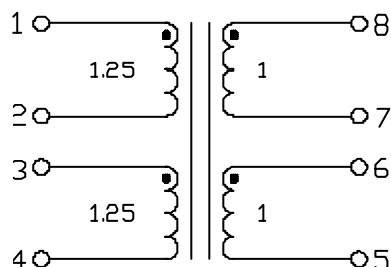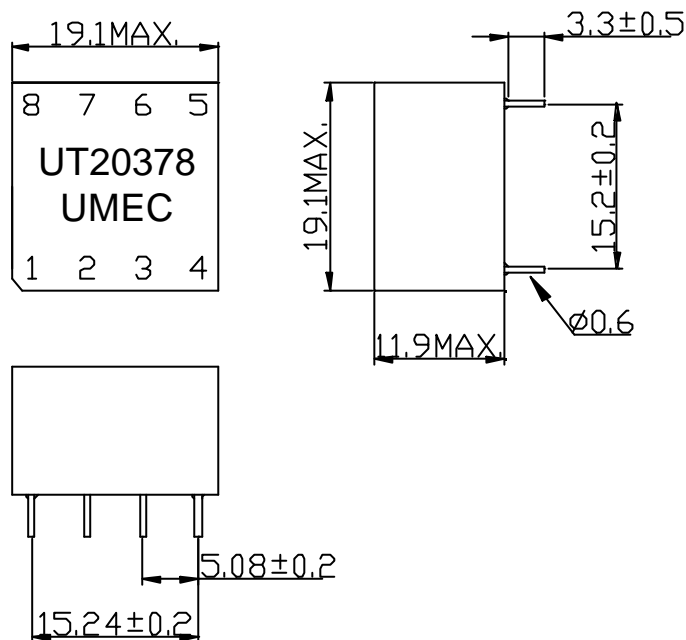

Note: Specifications are subject to change without prior notice.

Unit: mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C