


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT20493-TS	ISDN S-Interface Isolation Dual Transformer	A0	99/29

Characteristic data:

RI+II=2.4Ω±15%
 RIII+IV=2.4Ω±15%


Schematic diagram:

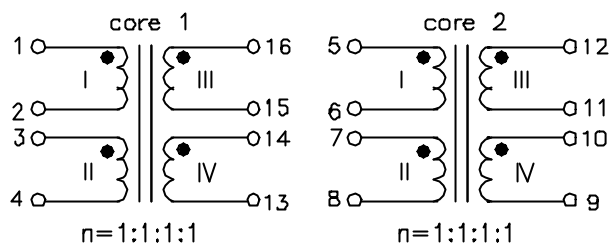

Electrical Specification at 25°C:

- LI+II≥22mH,(NI+II series),at 10KHz,100mV(core 1,2)
- Turns ratio tolerance: ±2%,(core 1,2)
- Cw/w≤130pF,(NI+II to NIII+IV),at 10KHz,100mV(core 1,2)
- Ls I+II≤5uH,(NI+II series, NIII+IV shorted),at 100KHz,100mV(core 1,2)
- HI-pot test:
 Up=2.0KVrms,2s,(NI+II to NIII+IV)(core 1,2)

Dimension:

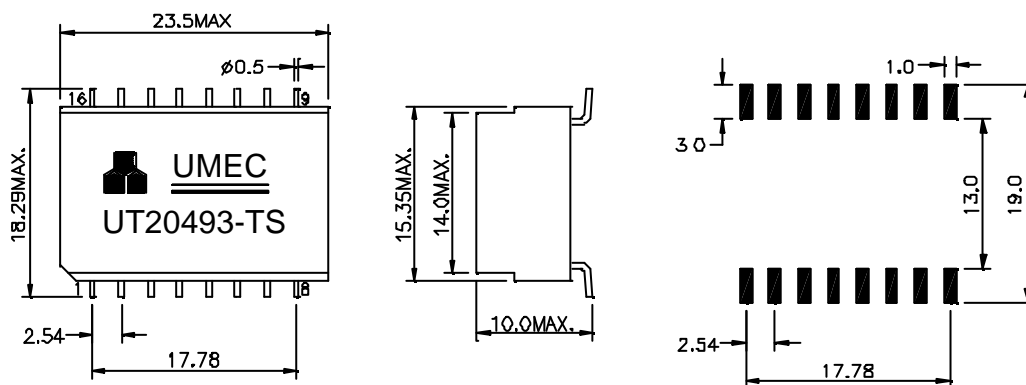

- NOTE:1. PACKAGING INFORMATION-TAPE AND REEL
 ACCORDING TO ITEM NO. "K30S" OF DATA SHEET 01-00
 2. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: ±0.25mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-013-C