


ISDN

| UM MODEL NO.: | SPECIFICATION | REV. | |
|---------------|---|------|---------|
| UT20493 | ISDN S-Interface Isolation Dual Transformer | A0 | 2000/07 |

Characteristic data:

RI+II=2.4Ω±15%
 RIII+IV=2.4Ω±15%


Schematic diagram:

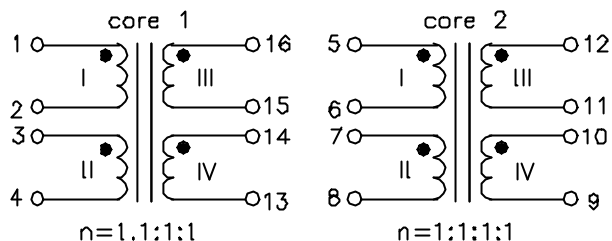

Electrical Specification at 25°C:

- LI+II≥22mH,(NI+II series),at 10KHz,100mV(core 1,2)
- Turns ratio tolerance: ±2%,(core 1,2)
- Cw/w≤130pF,(NI+II to NIII+IV),at 10KHz,100mV(core 1,2)
- Ls III+IV≤5uH,(NIII+IV series, NI+II shorted),at 100KHz,100mV(core 1,2)
- HI-pot test:
 Up=2.0KVrms,2SEC,(NI+II to NIII+IV)(core 1,2)

Dimension:

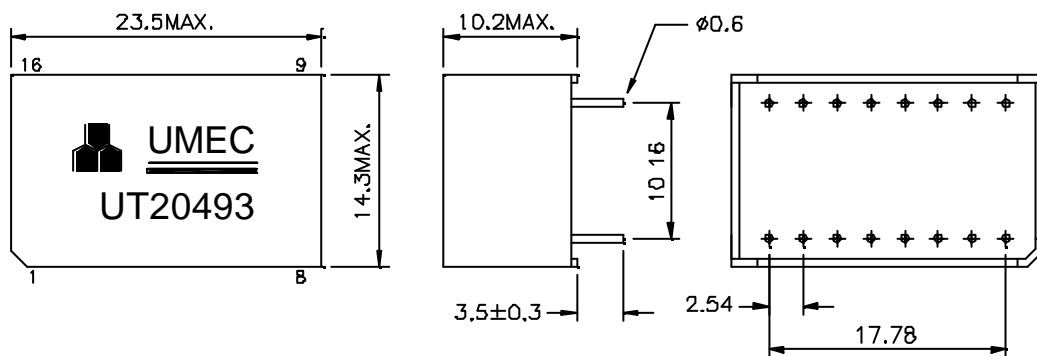

Note: Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: ±0.25mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-013-C