

DATA SHEET


UM MODEL NO.:	SPECIFICATION	REV.	
UT20535	64KBPS Interface Transformer	B1	98/06

Characteristic data:

$R_I \leq 2.65\Omega$

$R_{II} + R_{III} \leq 5.0\Omega$

Schematic diagram:

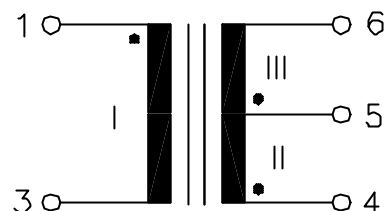


$n = 1:2CT$

Electrical Specification at 25°C:

- 1.) $L_I \geq 20mH$, at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance: $\pm 3\%$
- 3.) $C_k \leq 130pF$, (NI to NII+NIII), at 10KHz 100mV
- 4.) $L_S I \leq 5uH$, (NII+NIII shorted), at 100KHz 100mV
- 5.) HI-POT test:
 $U_p = 1.5KV_{rms}, 2s(NIII \text{ to } NI+NII)$

Dimension:

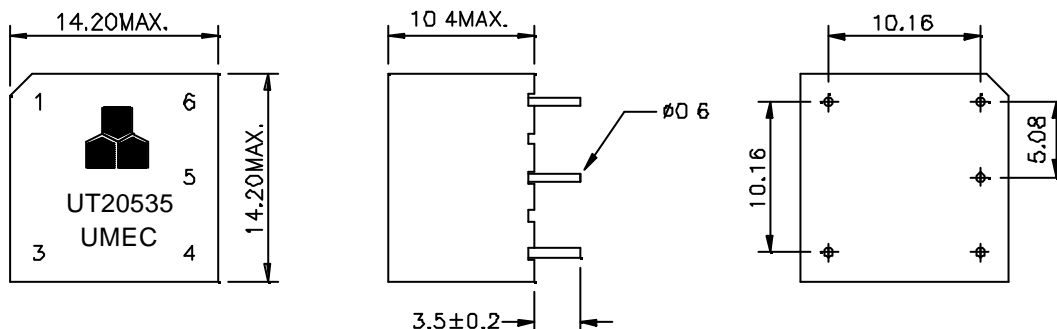

NOTE: Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: $\pm 0.25mm$



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-007-C