
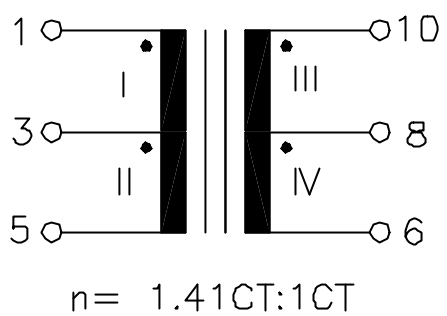


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT20788	T1/CEPT/ISDN-PRI Transformer	A0	97/27
Characteristic data: $R_{III+IV} \leq 0.6\Omega$ $R_I+R_{II} \leq 0.8\Omega$		Schematic diagram: 	
Electrical Specification at 25°C: 1.) $L_{III+IV} \geq 1.2mH$ , (N <sub>III+IV</sub> series), at 10KHz, 100mV 2.) Polarity and turns ratio tolerance $\pm 5\%$ 3.) $C_w/w \leq 20pF$ , (N <sub>I+II</sub> to N <sub>III+IV</sub> ), at 10KHz, 100mV 4.) $L_s$ III+IV $\leq 0.8uH$ , (N <sub>III+IV</sub> series, N <sub>I+II</sub> shorted), at 100KHz, 100mV 5.) HI-pot test: $U_p = 3.0KV_{rms}, 2s$ (N <sub>I+II</sub> to N <sub>III+IV</sub> )			
Dimension:  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm <span style="float: right;">Tolerances <math>\pm 0.25mm</math></span></p>			

E10-013-C

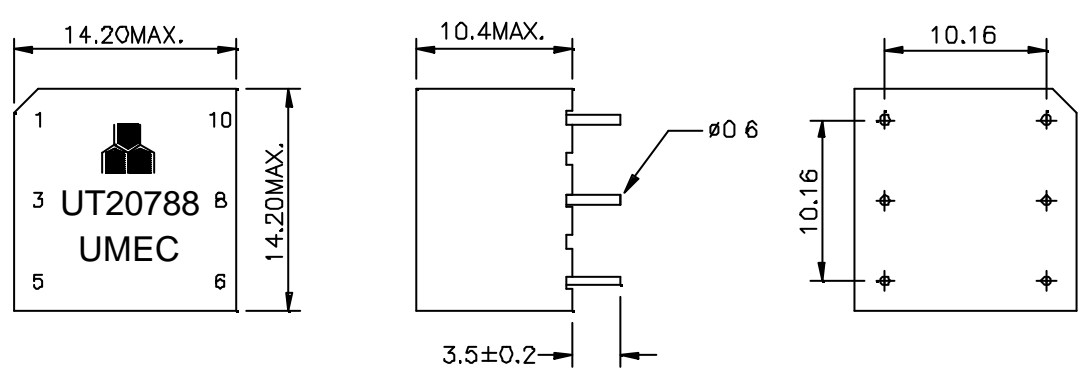

UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C