


# DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT20948	General Purpose Transformer	A1	05/34


Electrical Specifications at 25 °C :

1. Turns ratios: 1CT:1CT±5% , AT 15.75KHz 1V PIN(1-3-5):(2-4-6)
2. Inductance: 3.5 to 8.0mH, AT 10KHz 20mV PIN(1-5)
3. D.C.R: 0.5Ω Max. PIN(1-3-5), (2-4-6)
4. HI-POT: 1500Vac/1minute Leakage current 0.5mA Max. PIN(1-2-3):(6-5-4)

Dimensions & Schematics:

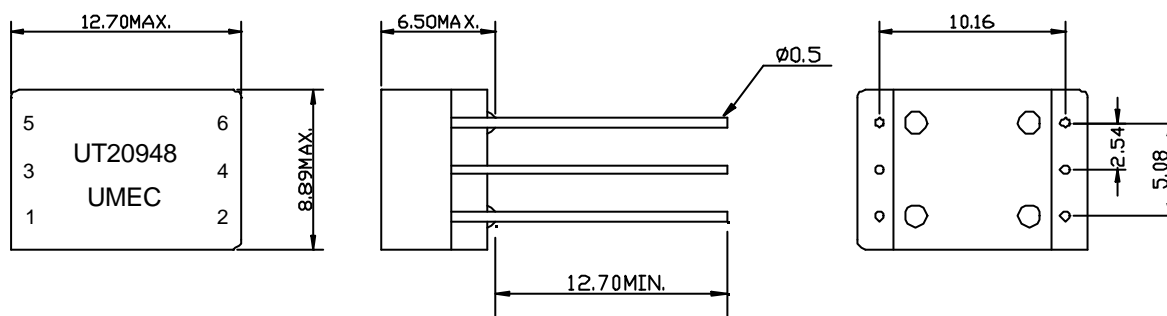

Tolerances: ±0.25mm



NOTE: 1. For RoHS compliant products:

- a.) The UMEC ordering code: **TG-UT20948**
- b.) Date Code suffix to "G" (xxxxG).
- c.) Solder : Sn/Cu .

2. Specifications are subject to change without prior notice.

Unit: mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C