


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT20950-TS	4-fold Common Mode Choke	A1	99/26

Characteristic data:  
 $R I \sim IV \leq 1.0\Omega$   
 $Tu(amb) \leq 60^{\circ}C$


Schematic diagram:

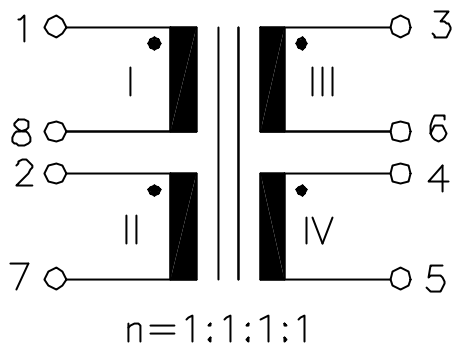

Electrical Specification at 25°C:

- 1.)  $L \geq 4700\mu H$ , at 10KHz, 100mV
- 2.) Polarity and turns ratio tolerance:  $\pm 1\%$
- 3.) HI-pot test:  
 $Up=0.5KVrms, 3s$ (Winding to Winding)

Dimension:

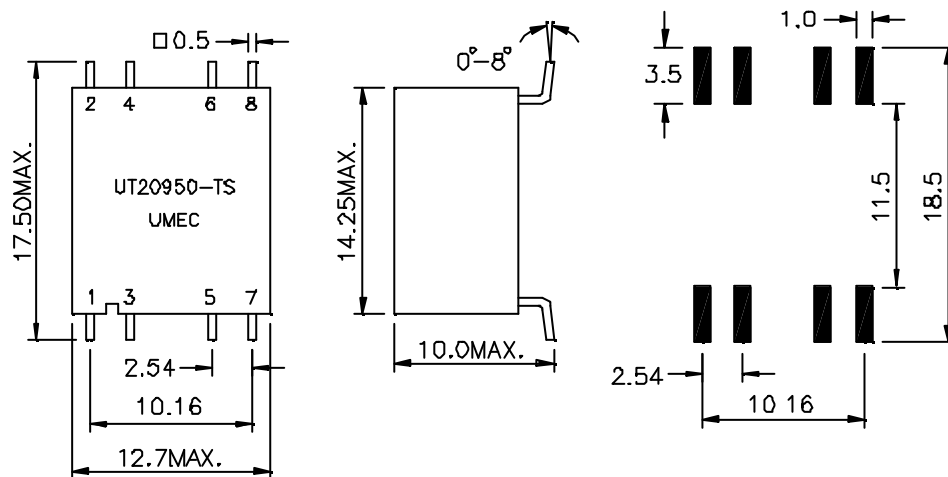

NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL  
 ACCORDING TO ITEM NO. "K20S<sup>2</sup>)" OF DATA SHEET 01-00  
 2.Specifications are subject to change without prior notice.

UNIT: mm

Tolerances:  $\pm 0.2mm$



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C

E10-013-C