


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT20995	S-Interface Isolation Transformer	A0	05/24

Characteristic data:

RI+ RII=2.4Ω±15%
 RIII+ RIV=4.8Ω±15%


Schematic diagram:

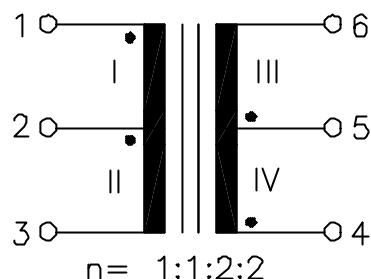

Electrical Specification at 25°C:

- LI+II≥22mH, (NI+II series), at 10KHz 100mV
- Polarity and turns ratio tolerance: ±2%
- Cw/w≤120pF, (NI+II to NIII+IV), at 10KHz 100mV
- L_SI+II≤10uH, (NI+II series, NII+IV shorted), at 100KHz 100mV
- HI-POT test:
 Up=2.0KVrms,2s (NI+II to NIII+IV)

Dimension:

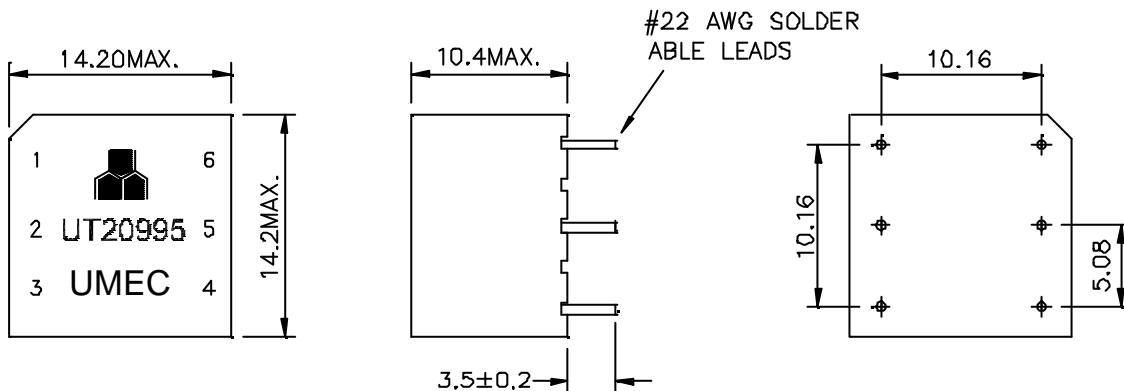

- NOTE : 1. For RoHS compliant products:
- The UMEC ordering code: **TG-UT20995**
 - Date Code suffix to "G" (xxxxG).
 - Solder : Sn/Cu .
2. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances±0.2mm

E10-013-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

**3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C**