
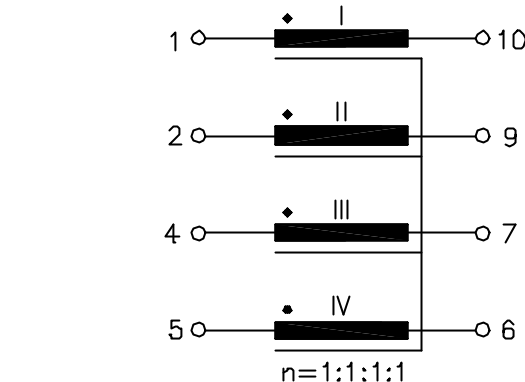


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21104	4-Fold Common Mode Choke	A1	98/47
<p>Characteristic data:</p> <p>RI ~ IV ≈ 1.8Ω</p> <p>In=150mA</p> <p>Tu(amb) ≤ 60°C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25°C:</p> <ol style="list-style-type: none"> <li>1.) L=90mH +50%/-30%, at 10KHz 100mV</li> <li>2.) Polarity and turns ratio tolerance: ±1%</li> <li>3.) Ls I ≤ 2.0uH, (NII, III, IV shorted), at 100KHz 100mV</li> <li>4.) HI-pot test: Up=0.5KVrms, 2s (Winding to Winding)</li> </ol>			
<p>Dimension:</p>  <p>Note: Specifications are subject to change without prior notice.</p> <p>UNIT: mm <span style="float: right;">Tolerances: ±0.2mm</span></p>			

E10-013-C

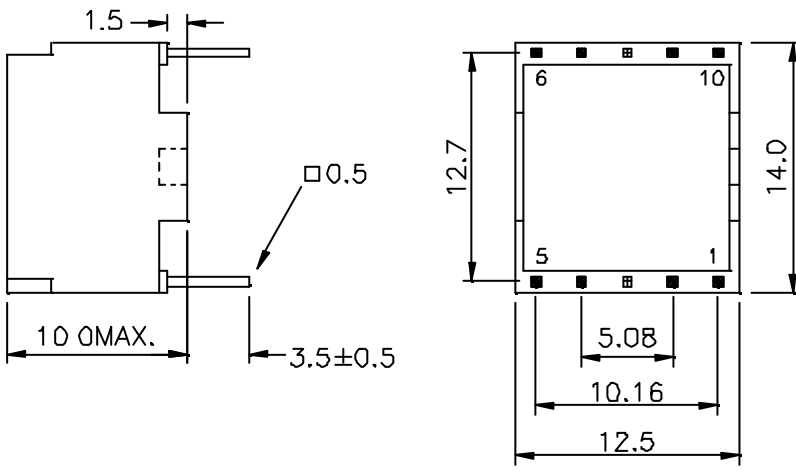

UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C