


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21302V-TS	2-Fold Common Mode Choke	A0	02/17

**Characteristic data:**

RI=RII  $\approx$  0.7 $\Omega$   
 In=100mA  
 Tu(amb) $\leq$ 60 $^{\circ}$ C


**Schematic diagram:**

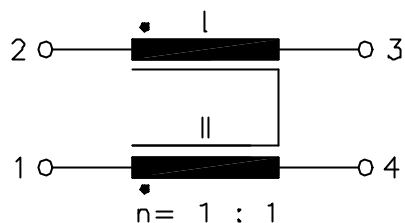

**Electrical Specification at 25 $^{\circ}$ C:**

- 1.) L=2.2mH +50%/-30%, at 10KHz 10mV
- 2.) Polarity and turns ratio tolerance  $\pm$ 1%
- 3.) HI-pot test:  
 Up=500Vrms,2s(Winding to Winding)

**Dimension:**

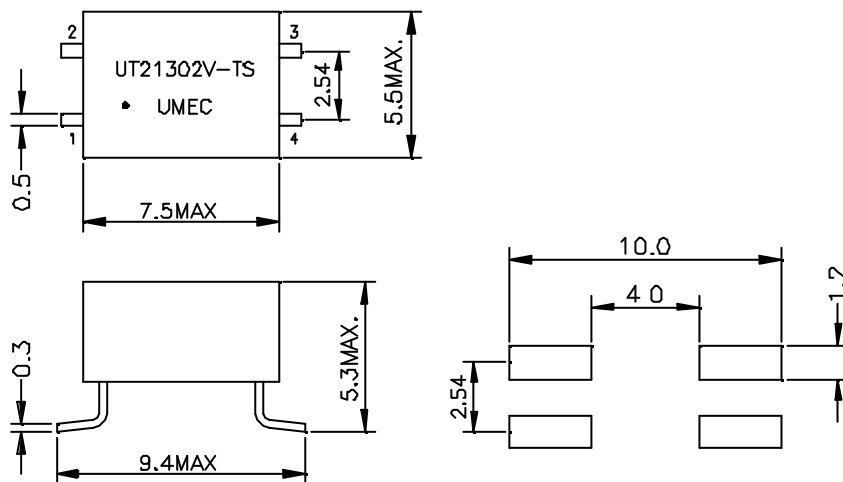

NOTE: 1. Packaging information-tape and reel according to item no. "K5SA" of data sheet 01-00  
 2. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances  $\pm$ 0.2mm

E10-013-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C