


DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT21319V-TS	2-Fold Common Mode Choke	A0	01/48

Characteristic data:
 $R_I = R_{II} \leq 2.0\Omega$


Schematic diagram:

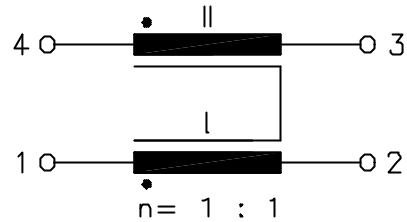

Electrical Specification at 25°C:

- 1.) $L \geq 10\text{mH}$, at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance $\pm 1\%$
- 3.) $C_w/w \leq 45\text{pF}$, (NI to NII), at 100KHz 1V
- 4.) $L_S I \leq 0.5\text{uH}$, (NII shorted), at 100KHz 1V
- 5.) HI-pot test:
 $U_p = 1500\text{V}_{\text{rms}}, 2\text{s}$ (Winding to Winding)

Dimension:

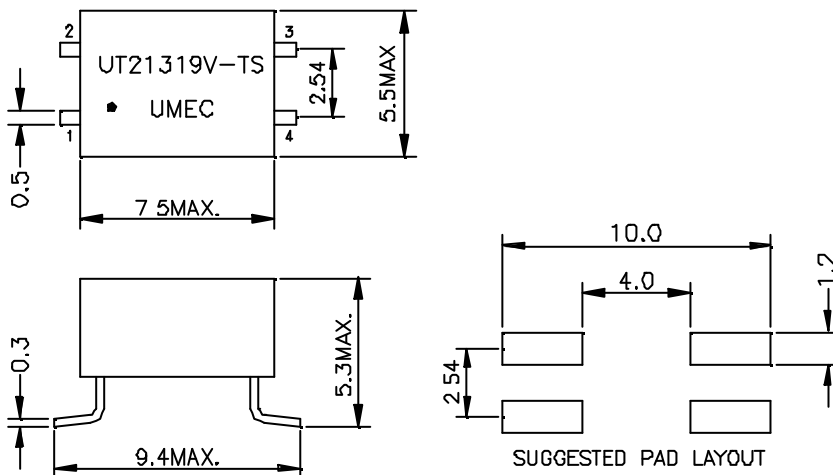

- NOTE: 1. Packaging information-tape and reel according to item no. "K5SA" of data sheet 01-00
 2. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: $\pm 0.2\text{mm}$

