


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21404-TS	2-Fold Common Mode Choke	B3	00/25

Characteristic data:

$R_I \sim R_{II} \approx 0.7\Omega$
 $I_n=400mA$
 $T_u(amb)\leq 60^{\circ}C$


Schematic diagram:

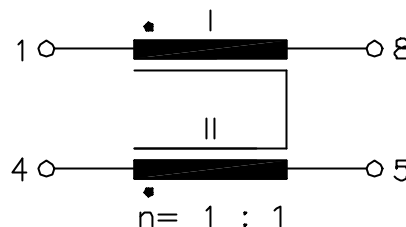

Electrical Specification at 25⁰C:

- 1.) $L=1.4mH +50\%/-30\%$, at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance $\pm 1\%$
- 3.) $L_S \leq 0.5uH$, (N_{II} shorted), at 100KHz 100mV
- 4.) HI-pot test:
 $U_p=500V_{rms}, 2s$ (Winding to Winding)

Dimension:

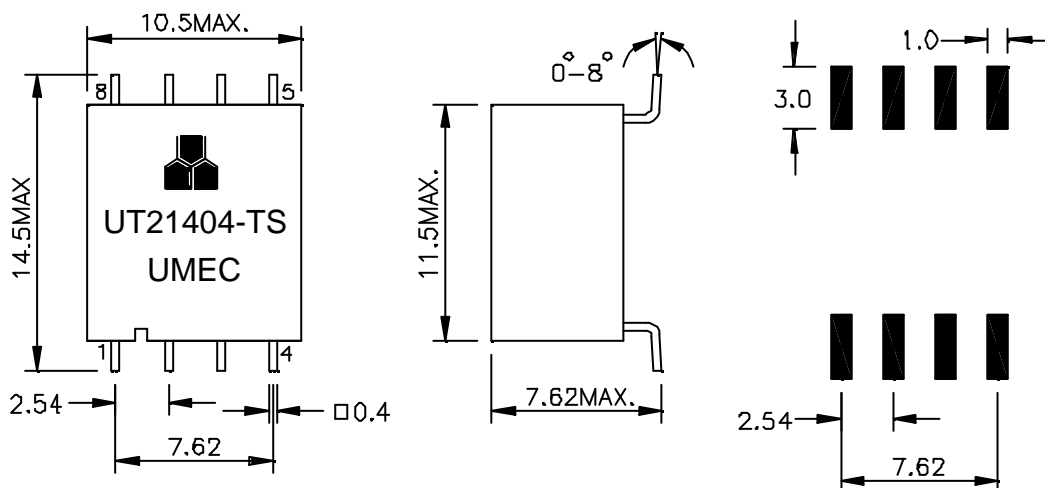

- NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL
 ACCORDING TO ITEM NO. "K10S01" OF DATA SHEET 01-00
 2.Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: $\pm 0.2mm$

E10-013-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C