


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21405-TS	4-Fold Common Mode Choke	B3	06/33

Characteristic data:

RI ~ RIV ≈ 0.65Ω
 In=300mA
 Tu(amb)≤60°C


Schematic diagram:

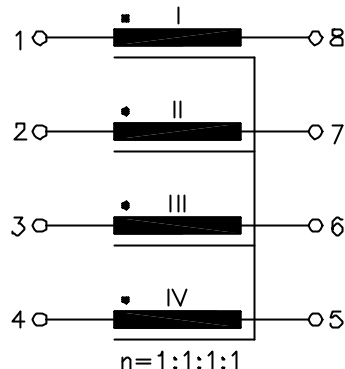

Electrical Specification at 25°C:

- 1.) L=1.4mH +50%/-30%, at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance±1%
- 3.) L_S ≤0.6uH, (NII, III, IV shorted), at 100KHz 100mV
- 4.) HI-pot test:
 Up=500Vrms,2s(Winding to Winding)

Dimension:

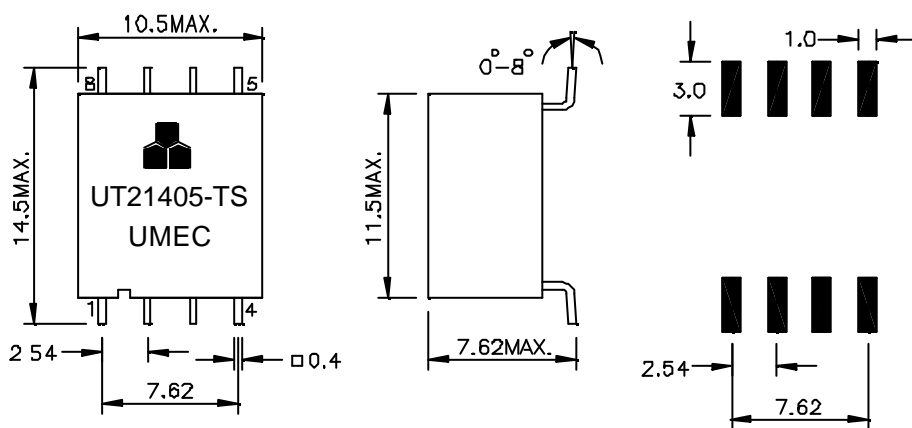

- NOTE:
1. Packaging Information: Tape and Reel according to Item NO.“K10S01” OF DATA SHEET 01-00
 2. For RoHS compliant products:
 - a.) The UMEC ordering code: **TG-UT21405-TS**
 - b.) Date Code suffix to “G” (xxxxG).
 - c.) Solder : Sn/Ag/Cu .
 3. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances: ±0.2mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-013-C