
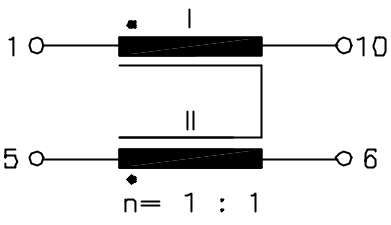


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21522	2-Fold Common Mode Choke	A1	98/47
<p>Characteristic data:</p> <p>RI=RII <math>\approx</math> 2.1<math>\Omega</math></p> <p>In=200mA</p> <p>Tu(amb)<math>\leq</math>60<math>^{\circ}</math>C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25<math>^{\circ}</math>C:</p> <ol style="list-style-type: none"> <li>1.)L=70mH +50%/-30%, at 10KHz 100mV</li> <li>2.)Polarity and turns ratio tolerance<math>\pm</math>1%</li> <li>3.)Ls I<math>\leq</math>1.0uH,(NII shorted), at 100KHz 100mV</li> <li>4.)HI-pot test: Up=0.5KVrms,2s(Winding to Winding)</li> </ol>			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm <span style="float: right;">Tolerances<math>\pm</math>0.2mm</span></p>			

E10-013-C

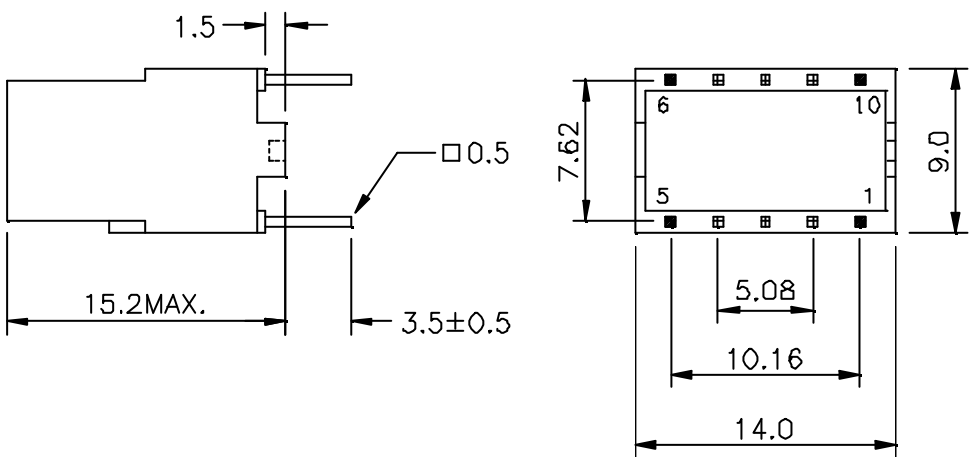

UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C