
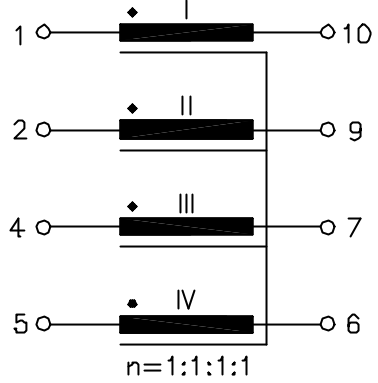


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21551	4-Fold Common Mode Choke	A1	98/47
<p>Characteristic data:</p> <p>RI ~ IV $\approx 1.0\Omega$ In=200mA Tu(amb)$\leq 60^{\circ}\text{C}$</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.)L=58mH +50%/-30%, at 10KHz 100mV 2.)Polarity and turns ratio tolerance$\pm 1\%$ 3.)Ls I$\leq 1.5\mu\text{H}$, (NII, III, IV shorted), at 100KHz 100mV 4.)HI-pot test: Up=0.5KVrms,2s(Winding to Winding) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances$\pm 0.2\text{mm}$</p>			

E10-013-C

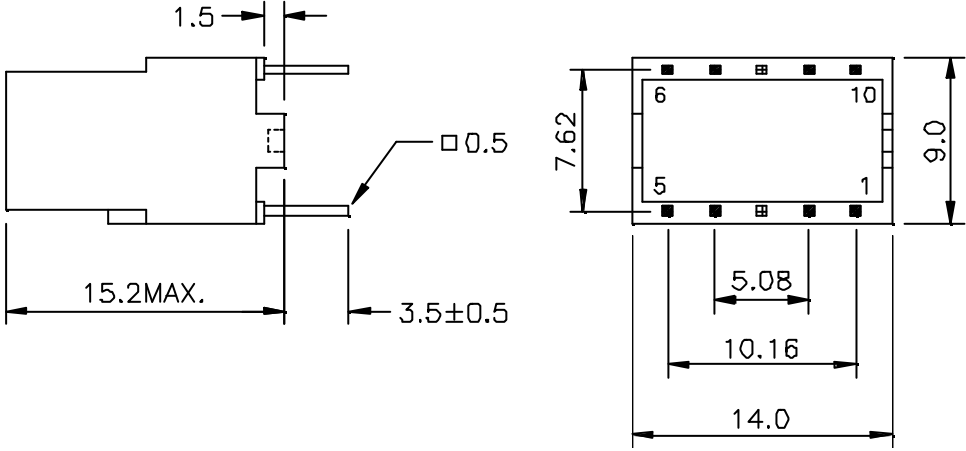

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C