


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21556	S _{2M} -Interface Transformer	A3	05/53

Characteristic data:

f=50KHz...3.1MHz
 RI=RII ≈0.3Ω
 RII=RIII ≈0.15Ω
 Tu(amb)≤60°C

Schematic diagram:

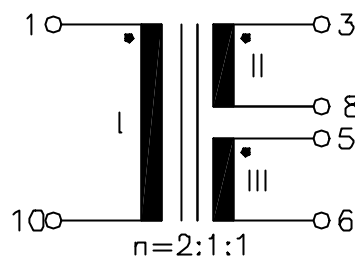


Electrical Specification at 25°C:

- LI≥2mH, at 10KHz 100mV
- Polarity and turns ratio tolerance±2%
- LsII=LsIII≤0.5uH,(NI shorted), at 100KHz 100mV
- HI-pot test:
 Up=2.0KVrms,5s(NIII to NI+NII)
 Up=0.5KVrms,2s(NI to NII)



Dimension:

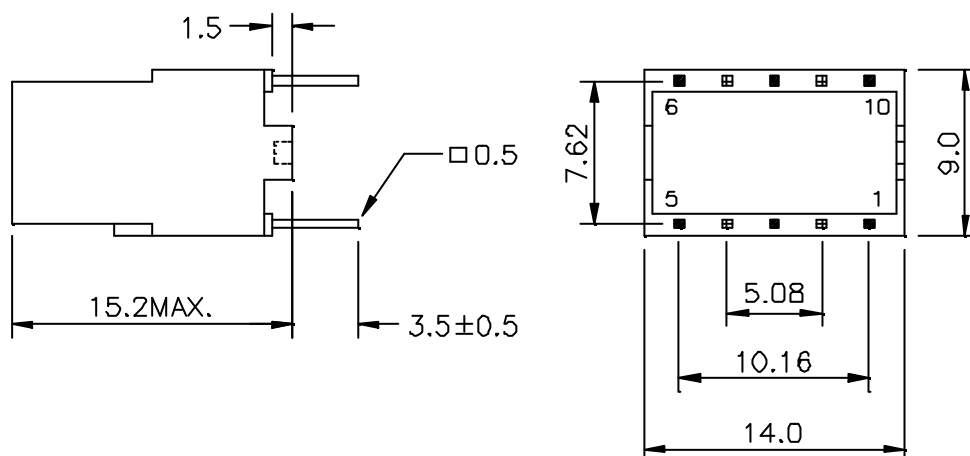

- NOTE : 1. For RoHS compliant products:
 a.) The UMEC ordering code: **TG-UT21556**
 b.) Date Code suffix to "G" (xxxxG).
 c.) Solder : Sn/ Cu .
 2. Specifications are subject to change without prior notice.

UNIT: mm

Tolerances±0.2mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C

E10-013-C