


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21706	S _{2M} -Interface Transformer	A2	01/22

Characteristic data:

f=50KHz...3.1MHz
 RI=RII ≈ 0.70Ω
 RIII ≈ 0.25Ω
 Tu(amb)≤60°C


Schematic diagram:

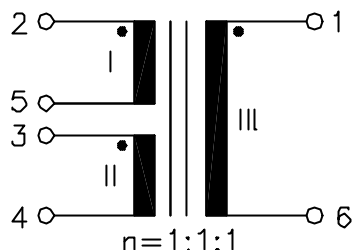

Electrical Specification at 25°C:

- 1.) L_{III} ≥ 12mH, at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance ±2%
- 3.) L_{s III} ≤ 5.0uH, (N_{III}, N_I+N_{II} shorted), at 100KHz 100mV
- 4.) HI-pot test:
 U_p = 4.0KVrms, 2s (N_{III} to N_I+N_{II})
 U_p = 0.5KVrms, 2s (N_I to N_{II})

Dimension:

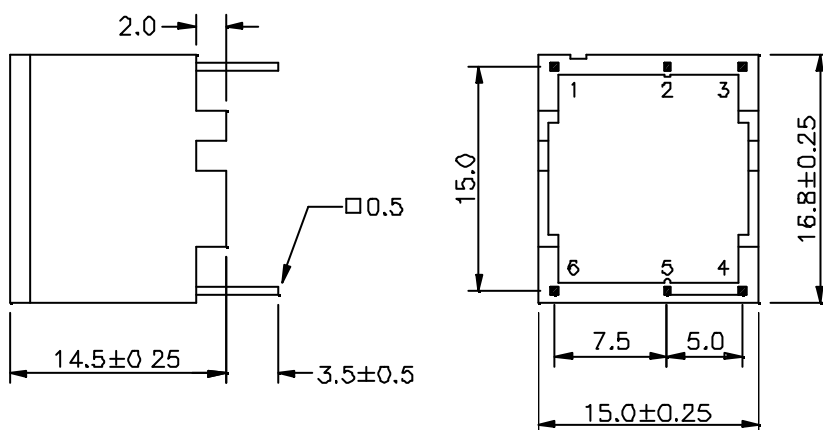

NOTE: Specifications are subject to change without prior notice.

UNIT: mm

Tolerances ±0.2mm

E10-013-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C