


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21729	S <sub>O</sub> -Interface Transformer	A2	01/22

**Characteristic data:**

$f=96\text{KHz}$   
 $C_{wIII+IV} \approx 130\text{pF}$   
 $R_I=R_{II} \approx 1.5\Omega$   
 $R_{III}=R_{IV} \approx 1.2\Omega$   
 $\Delta I_{dc}=5\text{mA}$   
 $T_u(\text{amb}) \leq 60^\circ\text{C}$


**Schematic diagram:**

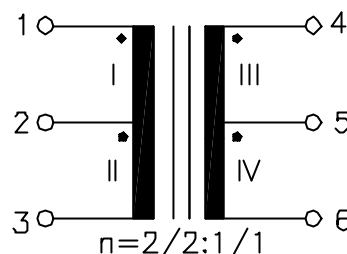

**Electrical Specification at 25<sup>0</sup>C:**

- 1.)  $L_{III+IV} \geq 30\text{mH}$ , (N<sub>III</sub>+N<sub>IV</sub> series), at 10KHz 100mV
- 2.) Polarity and turns ratio tolerance  $\pm 1\%$
- 3.)  $C_k \leq 15\text{pF}$ , (N<sub>I</sub>+ N<sub>II</sub> to N<sub>III</sub>+ N<sub>IV</sub>), at 10KHz 100mV
- 4.)  $L_{sIII+IV} \leq 15.0\mu\text{H}$ , (N<sub>III</sub>+N<sub>IV</sub> series, N<sub>I</sub>+N<sub>II</sub> shorted), at 100KHz 100mV
- 5.)  $Z_{III}=Z_{IV} \geq 625\Omega$ , at 20KHz 100mV with  $\Delta I_{dc}=5\text{mA}$
- 6.) HI-pot test:  
 $U_p=4.0\text{KV}_{rms}, 2s(N_I+ N_{II} \text{ to } N_{III}+ N_{IV})$

**Dimension:**

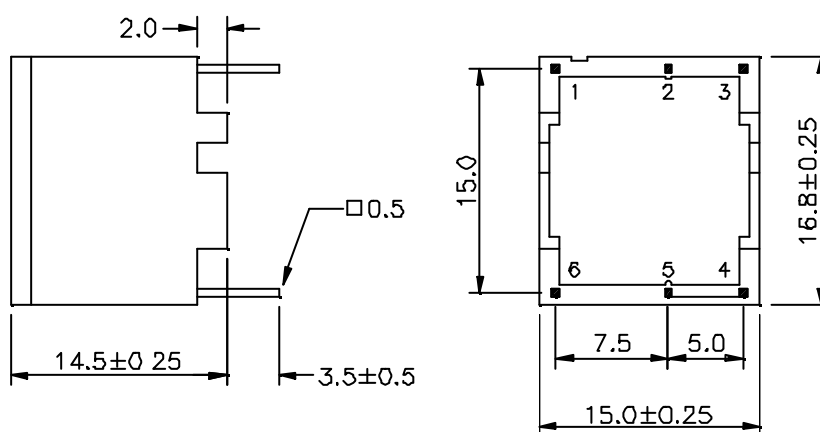

NOTE: Specifications are subject to change without prior notice.

UNIT: mm

Tolerances  $\pm 0.2\text{mm}$



**UNIVERSAL MICROELECTRONICS CO.,LTD.**  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C

E10-013-C