
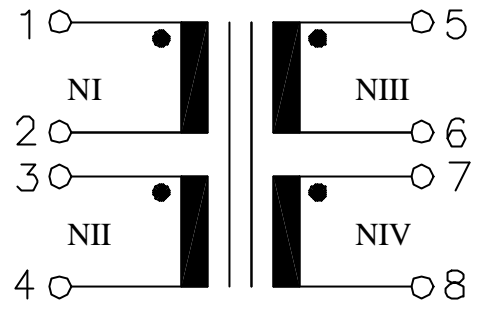


# ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21913	U <sub>KO</sub> -Interface Transformer	A0	96/41
<p>Characteristic Data:</p> <p>f=60KHz            RI+RII=20.0Ω(max.)            RIII+RIV=3.0Ω(max.)            Idc=60mA(max.)</p>		<p>Schematic Diagram:</p>  <p>NI:NII:NIII:NIV : 0.75:0.75:0.5:0.5</p>	
<p>Electrical Specification at 25<sup>o</sup>C:</p> <p>1.)LI+LII=25.6mH ~ 28.4mH (NI+NII series),at 10KHz,100mV            2.)Polarity and turns ratio tolerance±2%            3.)HI-pot test:            Up=2.0KVrms,2s(NI to NIII+NIV ; NII TO NIII+NIV)</p>			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm <span style="float: right;">Tolerances: ±0.2mm</span></p>			

E10-013-C

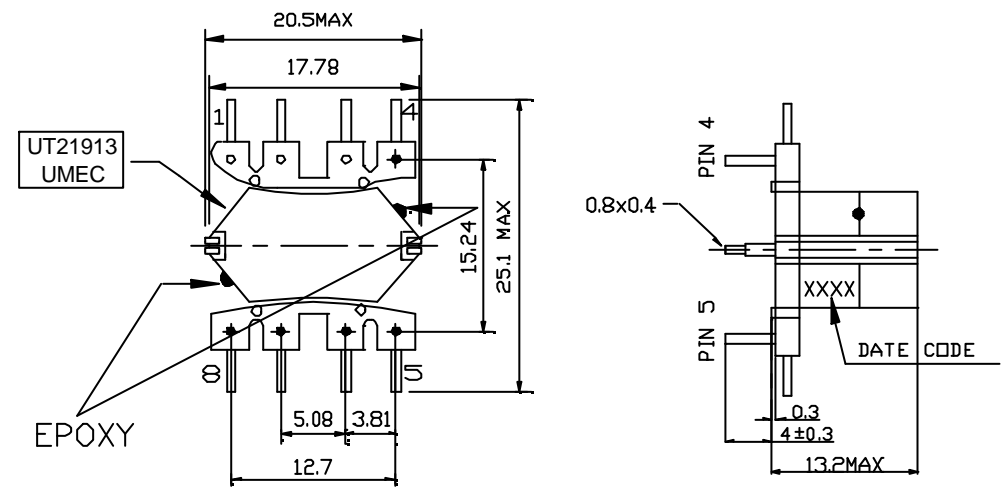

UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C