
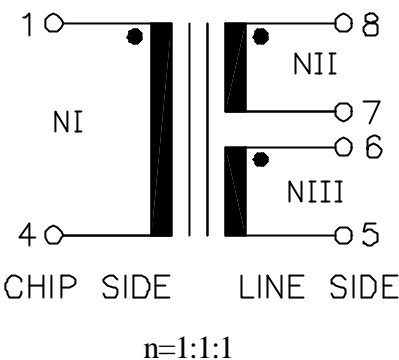


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT21956	U _{KO} -Interface Transformer	Pre.	01/03
<p>Characteristic Data:</p> <p>f=192KHz RI ≈ 3.2Ω RII + RIII ≈ 5.2Ω I_{dc}=60mA(max.) Operational and Storage Temp. -40⁰C to + 85⁰C</p>		<p>Schematic Diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.) L_{II+III}=14.5mH +5%/-5%,(NI+II series),at 10KHz,100mV 2.) Polarity and turns ratio tolerance±2% 3.) C_k≤50pF,(NI to NII+ NIII),at 10KHz,100mV 4.) L_{s II+III}≤70uH,(NII +NIII , NI shorted),at 100KHz,100mV 5.) HI-pot test: <ul style="list-style-type: none"> Up=2.0KVrms,2s(NI to NII+NIII) Up=0.5KVrms,2s(NII to NIII) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: ±0.2mm</p>			

E10-013-C

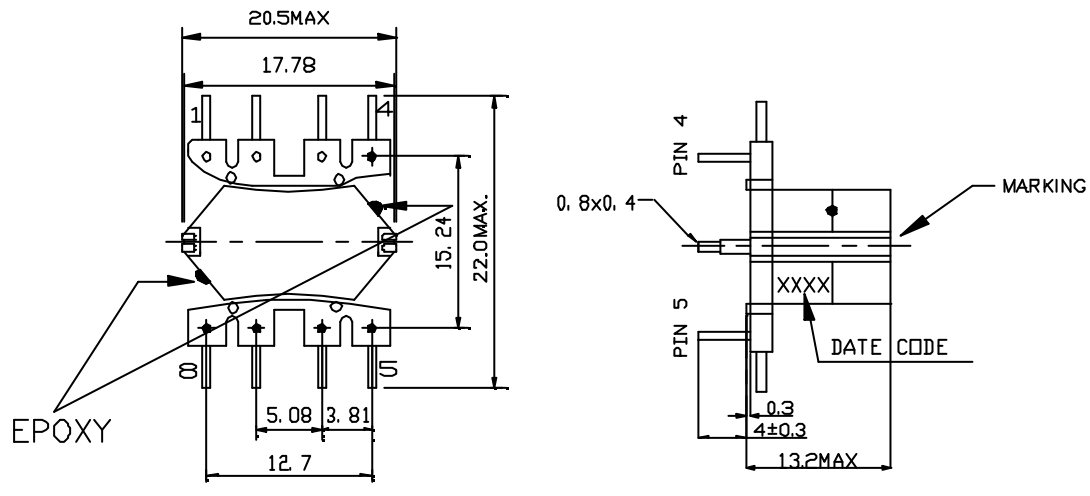