

DATA SHEET




UM MODEL NO.: UT23026	SPECIFICATIONS	REV.	
	T1/E1/CEPT/ISDN-PRI TRANSFORMERS	B2	05/27

Electrical Specifications at 25 °C:




- Turns Ratio: 1CT:1CT±5% AT 15.75KHz 1Vrms., PIN(16-15-14):(1-2-3)
1CT:1.36CT±5% AT 15.75KHz 1Vrms., PIN(6-7-8):(11-10-9)
- Pri. Inductance: 1.2mH Min. AT 100KHz 20mVrms
- Interwinding Capacitance: 30pF Max. AT 100KHz 1Vrms.
- Leakage Inductance: 0.6uH Max. AT 100KHz 1Vrms.
- Pri. DC.Resistance: 0.7ΩMax.
- Sec. D.C.Resistance: 0.7Ωmax.(RX)&1.0ΩMax.(TX)
- Hi-Pot: 1500Vrms/2sec. Leakage Current 0.5mA Max. Pri. to Sec.
- Pri. Pins: 16-14,6-8

Dimensions & Schematics:

Non-RoHS:

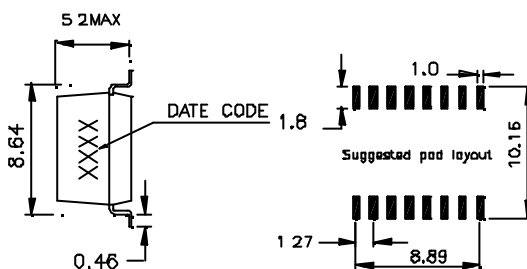

RoHS Compliant:



Coplanarity:0.1mm Tolerance:±0.25mm



NOTE : 1. Packaging Information:

- Non-RoHS : Tape and Reel according to Item NO.“SO16 ” of data sheet 01-00
 - RoHS compliant: Tape and Reel according to Item NO.“SO16A ” of data sheet 01-00
2. For RoHS compliant products:
- The UMEC ordering code: TG-UT23026
 - Date Code suffix to “G” for Green Product(XXXXG).
 - Solder : Sn/Ag/Cu .
3. Specifications are subject to change without prior notice.

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C