





DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	1/1
UT23028	T1/E1/CEPT/ISDN-PRI TRANSFORMERS	A3	06/03

ELECTRICAL SPECIFICATIONS AT 25 °C :

- XMIT TURNS RATIO :1:2CT±2% AT 15.75KHz 1Vrms.
RCV TURNS RATIO : 1:2CT±2% AT 15.75KHz 1Vrms.
- PRI. INDUCTANCE : 1.2 mH min. AT 10KHz 20mVrms.
- INTERWINDING CAPACITANCE : 35 pF max. AT 100KHz 1Vrms.
- LEAKAGE INDUCTANCE : 0.6 uH max. AT 100KHz 1Vrms.
- DC RESISTANCE : THD Ω max., XMIT & RCV
- HI-POT : 1500Vrms/2SEC. LEAKAGE CURRENT 0.5mA Max. PRI. TO SEC.
- PRI. PINS : XMIT (4-5),(9-10),(14-15),(19-20)
RCV (24-25),(29-30),(34-35),(39-40)

DIMENSIONS & SCHEMATIC:

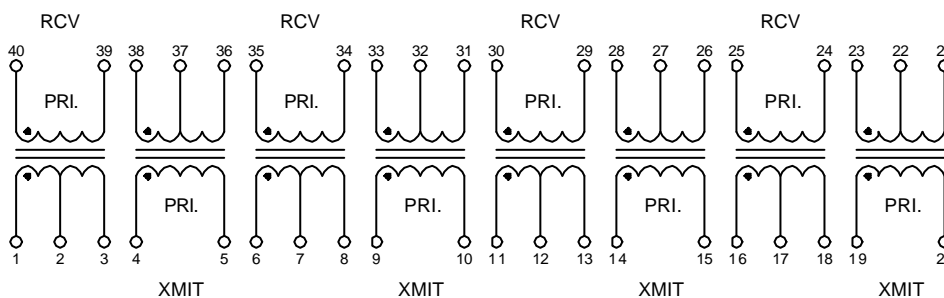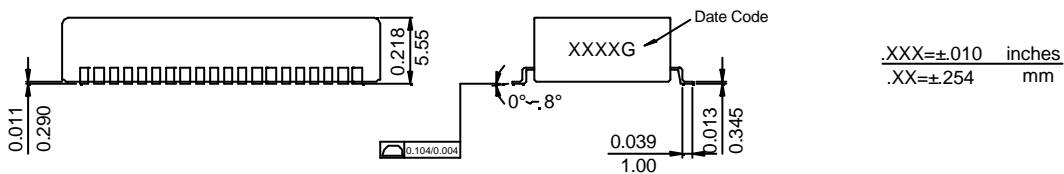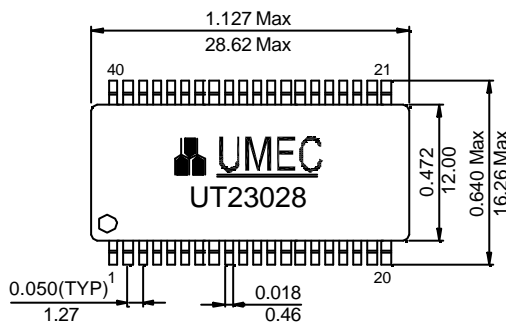

- NOTE: 1. Packaging information-tape and reel according to item no. "SO40" of data sheet 01-00.
 2. For RoHS compliant products:
 a.) UMEC Ordering Code: **TG-UT23028**
 b.) Date Code suffix to "G" (xxxxG).
 c.) Solder: Sn/Ag/Cu.
 3. Specifications are subject to change without prior notice.

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
 http://www.umec-web.com Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C