


DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT23061	T1/CEPT/ISDN-PRI TRANSFORMER	A0	00/52

ELECTRICAL SPECIFICATIONS AT 25 °C :

1. TURNS RATIO : 1CT:2.42CT±5% AT 15.75KHz 1Vrms.PIN(1-2-3):(16-15-14)
1CT:2.42CT±5% AT 15.75KHz 1Vrms.PIN(6-7-8):(11-10-9)
2. PRI. INDUCTANCE : 1.2mH Min. AT 10KHz 20mVrms.
3. INTERWINDING CAPACITANCE : 25pF Max. AT 100KHz 1Vrms.
4. LEAKAGE INDUCTANCE : 0.6uH Max. AT 100KHz 1Vrms.
5. PRI. DCR : 0.7Ω Max.
6. SEC. DCR : 1.2Ω Max.
7. HI-POT : 1500Vrms/2sec. LEAKAGE CURRENT 0.5mA Max. PRI. TO SEC.
8. PRI. PINS : 1-3 , 6-8

DIMENSIONS & SCHEMATICS:

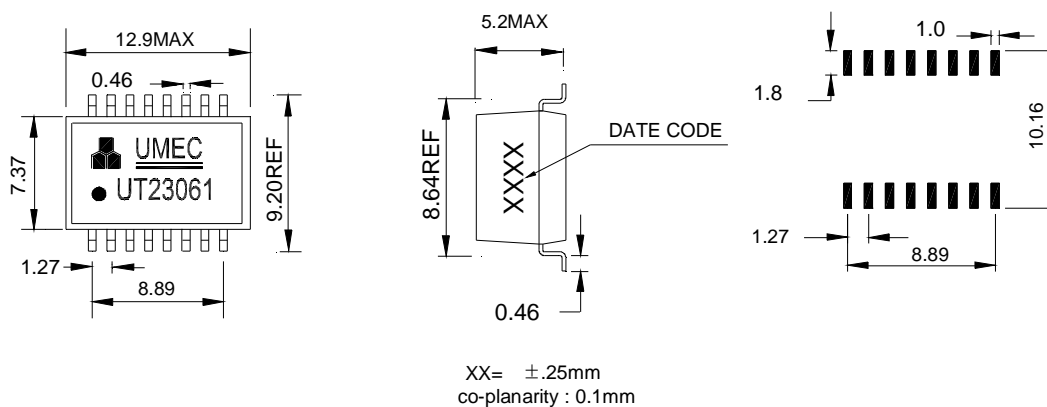

- NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL
ACCORDING TO ITEM NO. "SO16" OF DATA SHEET 01-00
2.Specifications are subject to change without prior notice.

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C