
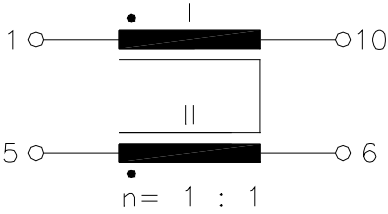


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28101	2-Fold Common Mode Choke	A1	99/05
<p>Characteristic data:</p> <p>RI~RII\approx0.5Ω In=300mA Tu(amb)\leq60$^{\circ}$C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25$^{\circ}$C:</p> <ol style="list-style-type: none"> 1.) L=2.2mH +50%/-30%, at 10KHz 100mV 2.) Polarity and turns ratio tolerance: \pm1% 3.) HI-pot test: Up=0.5KVrms,2s(Winding to Winding) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: \pm0.2mm</p>			

E10-013-C

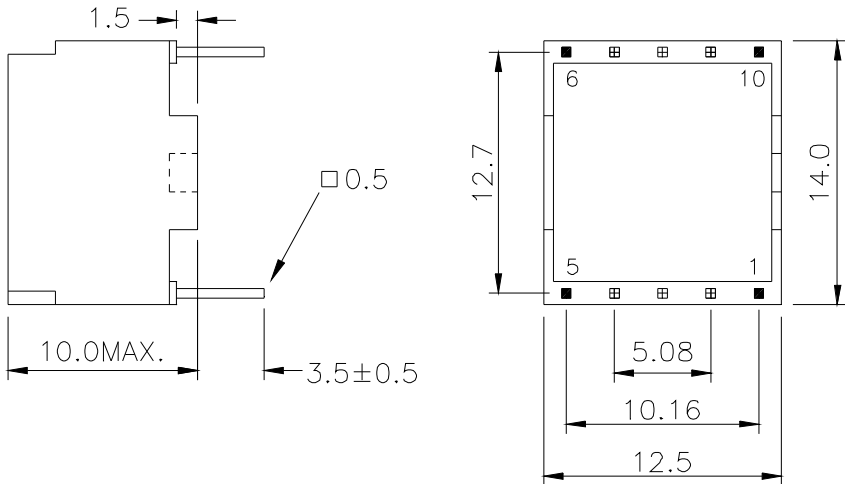

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C