
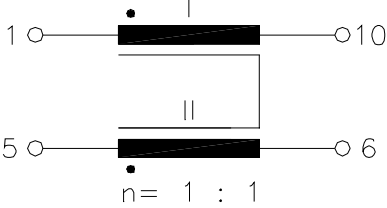


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28112-TS	2-Fold Common Mode Choke	A0	02/16
Characteristic data: $R_I = R_{II} \leq 2.0 \Omega$ $I_n = 250 \text{mA}$ $T_u(\text{amb}) \leq 60^\circ \text{C}$		Schematic diagram: 	
Electrical Specification at 25 ⁰ C: 1.) $L = 39 \text{mH} +50\%/-30\%$, at 10KHz 100mV 2.) Polarity and turns ratio tolerance: $\pm 1\%$ 3.) $L_s I \leq 1.5 \mu\text{H}$, (NII shorted), at 100KHz 100mV 4.) HI-pot test: $U_p = 0.5 \text{KV}_{\text{rms}}$, 3s (Winding to Winding)			
Dimension:  <p>Note: 1. Packaging information-tape and reel according to item no. "K20S" of data sheet 01-00 2. Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: $\pm 0.2 \text{mm}$</p>			

E10-013-C

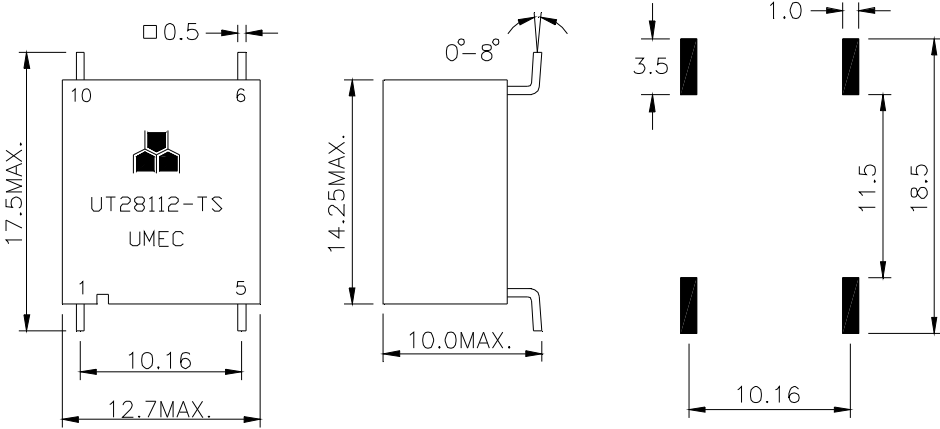

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C