
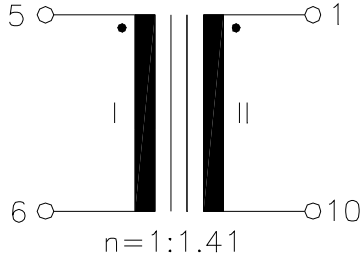


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28190-TS	S _{2M} -Interface Transformer	A2	2000/08
<p>Characteristic data:</p> <p>f=50KHz...3.1MHz</p> <p>RI ≈ 0.55Ω</p> <p>RII ≈ 0.8Ω</p> <p>Tu(amb) ≤ 70⁰C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.)LII ≥ 4mH, at 10KHz 100mV 2.)Polarity and turns ratio tolerance: ±2% 3.)LsII ≤ 2.0uH,(NI shorted), at 100KHz 100mV 4.)HI-pot test: Up=3.0KVrms,2s(NI to NII) 			
<p>Dimension:</p>  <p>NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL ACCORDING TO ITEM NO. "K20S²" OF DATA SHEET 01-00 2.Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: ±0.2mm</p>			

E10-013-C

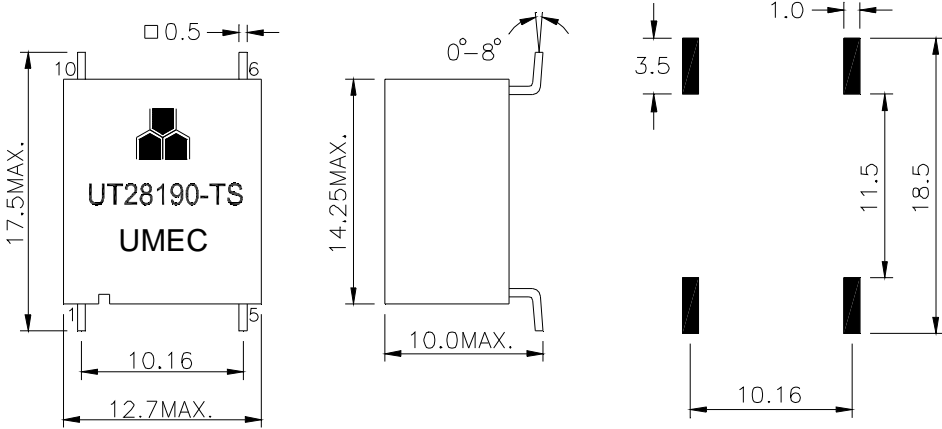

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C