
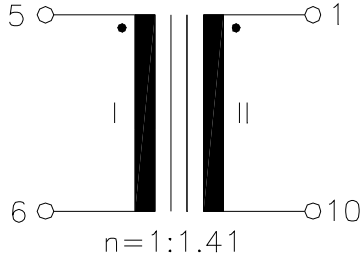


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28190N-TS	S _{2M} -Interface Transformer	A1	99/05
<p>Characteristic data:</p> <p>$f=50\text{KHz}\dots 3.1\text{MHz}$</p> <p>$R_I \approx 0.55\Omega$</p> <p>$R_{II} \approx 0.55\Omega$</p> <p>$T_u(\text{amb}) \leq 60^\circ\text{C}$</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.) $L_{II} \geq 4\text{mH}$, at 10KHz 100mV 2.) Polarity and turns ratio tolerance: $\pm 2\%$ 3.) $L_{sII} \leq 2.0\mu\text{H}$, (NI shorted), at 100KHz 100mV 4.) HI-pot test: Up=4.0KVrms, 2s(NI to NII) 			
<p>Dimension:</p>  <p>NOTE: 1.PACKAGING INFORMATION-TAPE AND REEL ACCORDING TO ITEM NO. "K20S" OF DATA SHEET 01-00 2.Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: $\pm 0.2\text{mm}$</p>			

E10-013-C

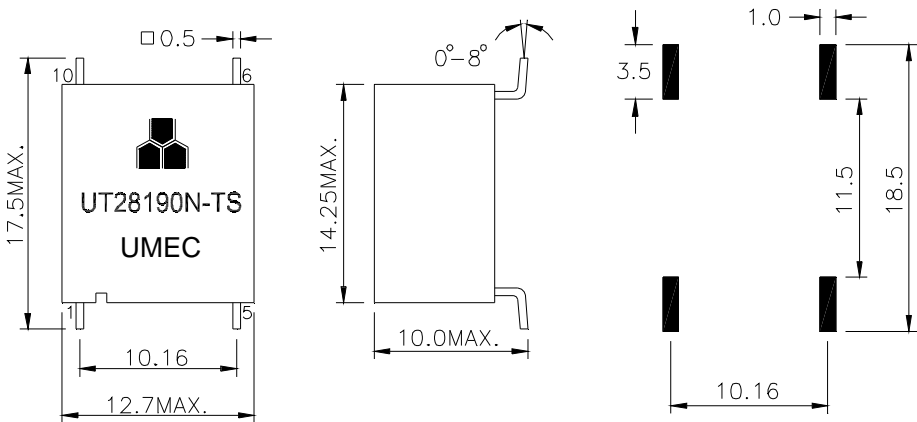

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C