
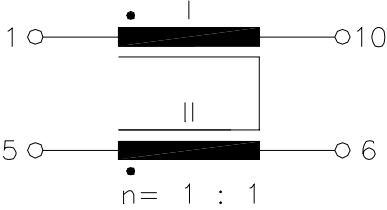


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28507A	2-Fold Common Mode Choke	A1	99/05
<p>Characteristic data:</p> <p>$R_I=R_{II}\leq 0.6\Omega$</p> <p>$I_n=300\text{mA}$</p> <p>$T_u(\text{amb})\leq 60^{\circ}\text{C}$</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.) $L_I=4.7\text{mH} +50\%/-30\%$, at 10KHz 100mV 2.) Polarity and turns ratio tolerance: $\pm 1\%$ 3.) $L_s I\leq 0.6\mu\text{H}$, (NII shorted), at 100KHz 100mV 4.) HI-pot test: $U_p=0.5\text{KV}_{\text{rms}}, 2\text{s}$ (Winding to Winding) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: $\pm 0.2\text{mm}$</p>			

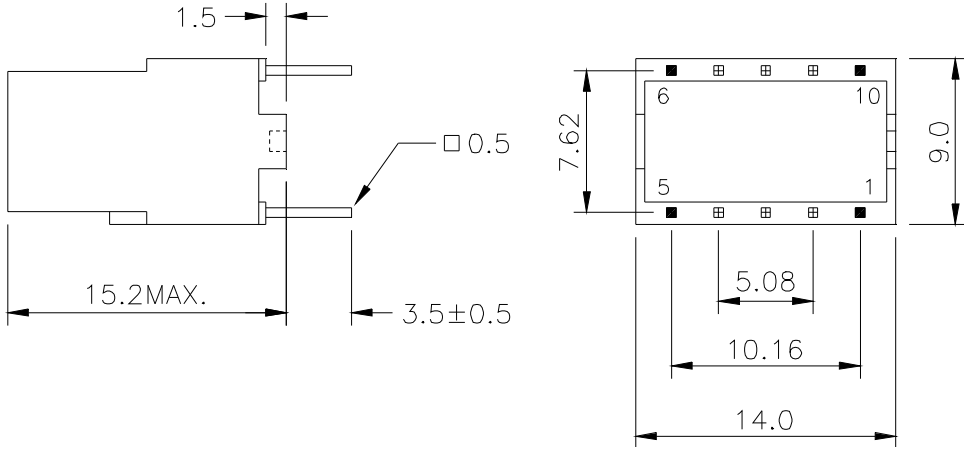