
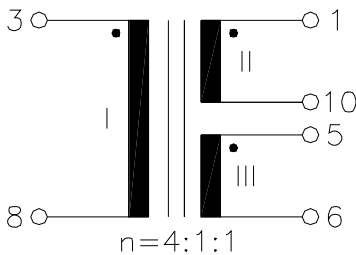


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28521	S _O -Interface Transformer	A1	99/05
<p>Characteristic data:</p> <p>RI \approx 5.0Ω</p> <p>RII=RIII \approx 1.2Ω</p> <p>Tu(amb)\leq60⁰C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.)LII+III\geq22mH,(NII+III series),at 10KHz 100mV 2.)Polarity and turns ratio tolerance: \pm2% 3.)Ck\leq105pF,(NI to NII NIII),at 10KHz 100mV 4.)LsII+III\leq4.0uH,(NII+III series, NI shorted),at 100KHz 100mV 5.)HI-pot test: <ul style="list-style-type: none"> Up=1.5KVrms,2s(NI to NII+NIII) Up=0.5KVrms,2s(NII to NIII) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: \pm0.2mm</p>			

E10-013-C

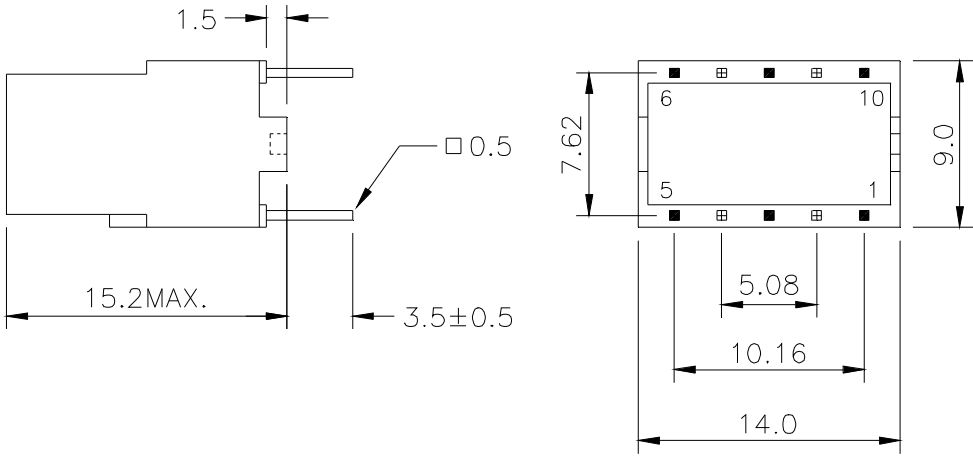

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C