
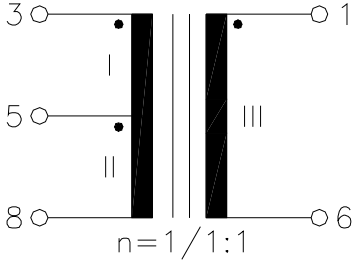


ISDN

UM MODEL NO.:	SPECIFICATION	REV.	
UT28521A	S _O -Interface Transformer	B0	99/09
<p>Characteristic data:</p> <p>RI+RII \approx 5.0Ω</p> <p>RIII \approx 2.4Ω</p> <p>Tu(amb)\leq60⁰C</p>		<p>Schematic diagram:</p> 	
<p>Electrical Specification at 25⁰C:</p> <ol style="list-style-type: none"> 1.)L_{RIII}\geq22mH, at 10KHz 100mV 2.)Polarity and turns ratio tolerance: \pm2% 3.)C_k\leq105pF,(NI+ NII to NIII),a t 10KHz 100mV 4.)L_sRIII\leq4.0uH,(NIII, NI+NII shorted), at 100KHz 100mV 5.)HI-pot test: Up=1.5KVrms,2s(NI+ NII to NIII) 			
<p>Dimension:</p>  <p>NOTE: Specifications are subject to change without prior notice.</p> <p>UNIT: mm Tolerances: \pm0.2mm</p>			

E10-013-C

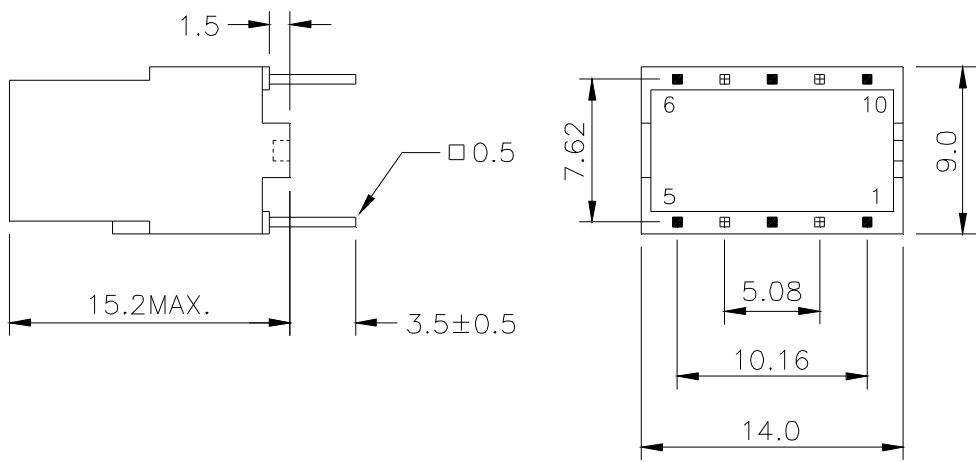

UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C