


DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT29112	STANDARD LOW POWER INDUCTOR	A0	01/09

ELECTRICAL SPECIFICATIONS AT 25 °C

1. INDUCTANCE : 88uH MAX. AT 1KHz , 50mV , PIN(1-2).
2. INDUCTANCE : 75uH TYP. AT 1KHz , 50mV , BIAS 2.4Adc , PIN(1-2).
3. D.C.Resistance : 180mΩ MAX.

DIMENSIONS & SCHEMATICS

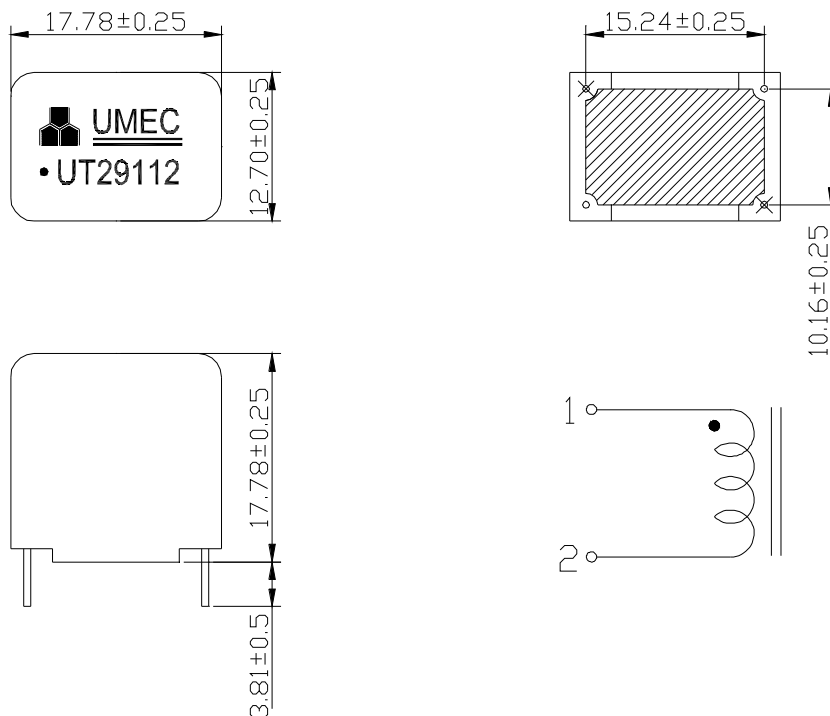

NOTE : Specifications are subject to change without prior notice.

UNIT : mm



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C

E10-007-C