


# ADSL

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT34203AS	Coupled Inductor Low Pass Pots Filter	A1	2005/51

## Electrical specification at 25°C:

- 1.) D.C.R. : 2.6Ω max. , Each Windings.
- 2.) D.C.R. Balance : ±2% .
- 3.) Inductance : 4.0mH±5% , AT 10KHz 100mV I<sub>dc</sub>=0~100mA ,Each Windings
- 4.) Inductance Balance : ±2% , AT 10KHz 100mV.
- 5.) SRF : 685KHz TYP.
- 6.) Q Value : 102 TYP. AT 10KHz 100mV , Each Windings .
- 7.) HI-pot test : 1.5KVrms / 60 Hz / 0.5 mA / 2 SEC. , PIN(1-5) TO PIN(6-10) .
- 8.) Pin 1&6 in Phase

## Schematic diagram & Dimension:

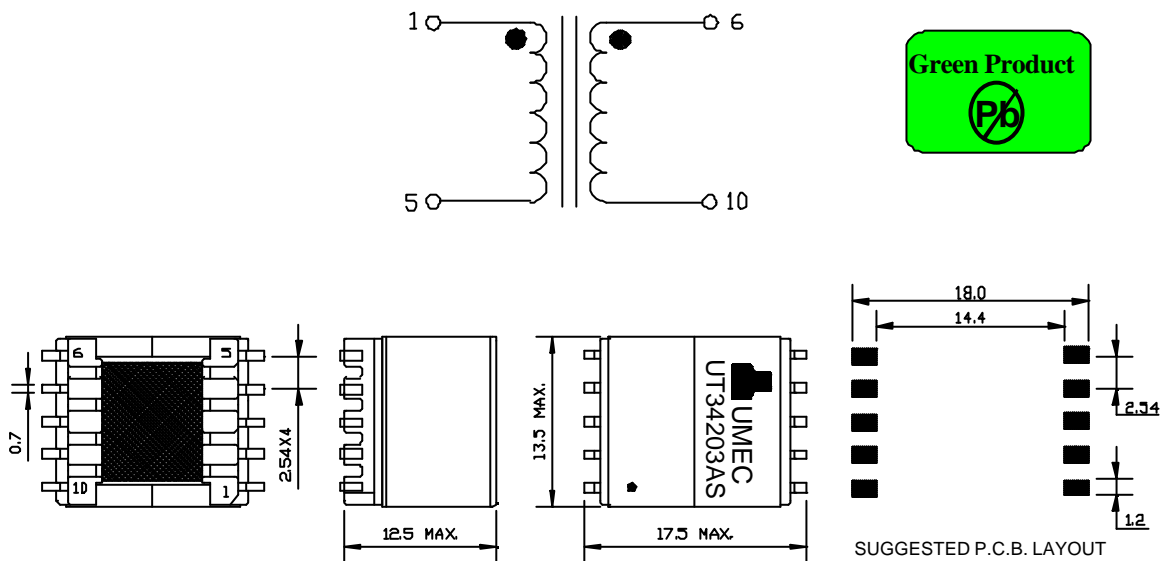

- NOTE :
1. Packaging Information: Tape and Reel according to Item NO. "EP13(SMD)" of data sheet 01-00
  2. For RoHS compliant products:
    - a.) The UMEC ordering code: **TG-UT34203AS**
    - b.) Date Code suffix to "G" (xxxxG).
    - c.) Solder : Sn/Ag/Cu .
  3. Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : ±0.2mm



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C

E10-033-C