


ADSL

UM MODEL NO.:	SPECIFICATIONS	REV.	1/1
UT34204A	Coupled Inductor For Low Pass Pots Filter	A6	02/25

ELECTRICAL SPECIFICATIONS AT 25⁰C

1. Inductance : 3.0mH \pm 5% , AT 10KHz 100mV I_{dc}=0~100mA ,Each Windings
2. Inductance Balance : \pm 2% , AT 10KHz 100mV .
3. D.C.R : 2.2 Ω max. , Each Windings
4. D.C.R Balance : \pm 2% .
5. S.R.F : 644KHz TYP.
6. Q Value : 97 TYP. AT 10KHz 100mV , Each Windings
7. Pin 1&6 in Phase.
8. HI-POT : 1.5KV_{rms} / 60 Hz / 0.5 mA / 2 SEC. , PIN(1-5) TO PIN(6-10)

DIMENSIONS & SCHEMATICS:

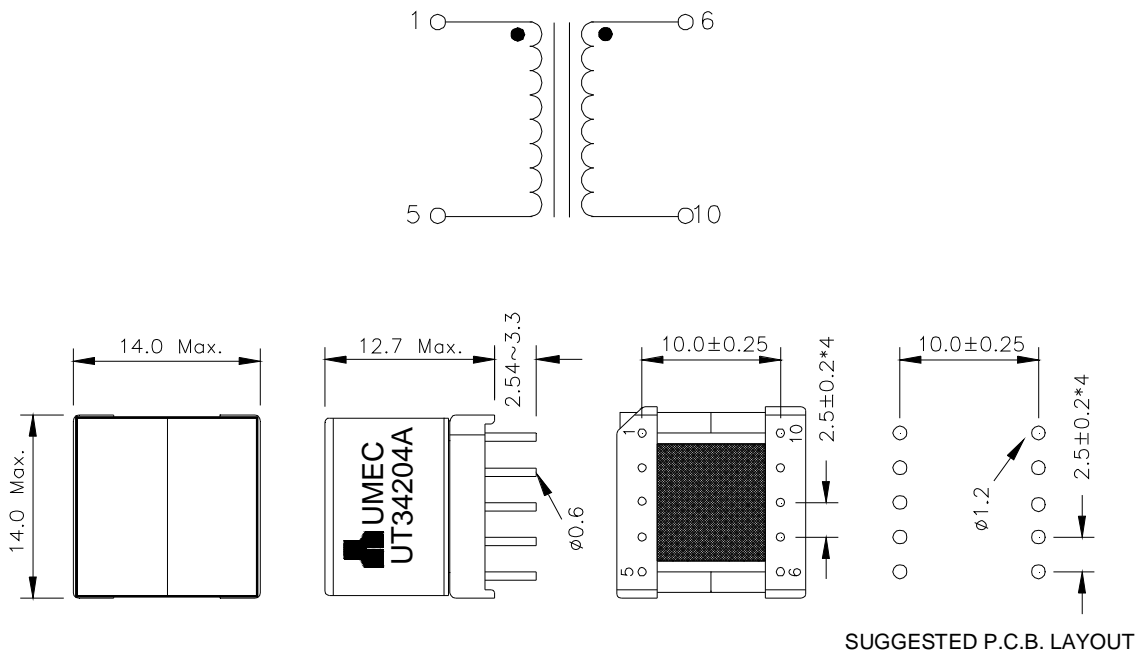

NOTE: Specifications are subject to change without prior notice.

UNIT : mm

E10-033-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C