




# DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT34367	COMMON MODE CHOKE	A0	03/33


ELELCTRICAL SPECIFICATION AT 25 °C :

1. INDUCTANCE : 27mH  $\pm$ 30%. AT 100KHz , 1V , Ls , PIN(1-8) , (4-5).
2. LEAKAGE INDUCTANCE :  
270uH MAX. AT 100KHz , 1V , PIN(1-8) , PIN4 & 5 SHORTED.
3. D.C.Resistance : 1100m $\Omega$  MAX. , PIN(1-8),(4-5).
4. TURNS RATIO & PHASE: 1:1 $\pm$ 2% AT 15.75KHz , 1V , PIN(1-8):(4-5).
5. DIELECTRIC STRENGTH : 1500Vrms/0.5mA/60Hz/2Sec. PIN1 TO PIN4.

DIMENSION & SCHEMATIC :

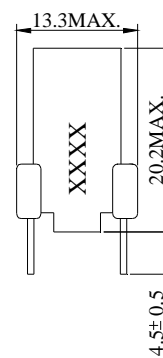

PIN2,3,6,7 CUT OFF



NOTE : specifications are subject to change without prior notice

UNIT : mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
TAICHUNG,TAIWAN,R.O.C