

DATA SHEET


UM PART NO.:	SPECIFICATION	REV.	
UT34915	COMMON MODE EMI SUPPRESSION INDUCTOR	A0	00/24

ELECTRICAL SPECIFICATION AT 25°C

1. INDUCTANCE : 8mH MIN. AT 1KHz , 0.5V , PIN(1-2).
2. LEAKAGE INDUCTANCE: 90uH MIN. AT 130KHz , 1V , PIN(1-2) , PIN3,4 SHORTED.
3. TURNS RATIO & PHASE: 1 : 1 ± 1% AT 15.75KHz , 1V , PIN(1-2):(3-4).
4. D.C.Resistance : (1) 120mΩ MAX. PIN(1-2).
(2) 120mΩ MAX. PIN(3-4).
5. DIELECTRIC STRENGTH: 1250Vrms/60Hz/0.5mA/2sec PIN(1-2) TO PIN(3-4).

DIMENSION & SCHEMATIC :

VERTICAL MOUNTING OUTLINE

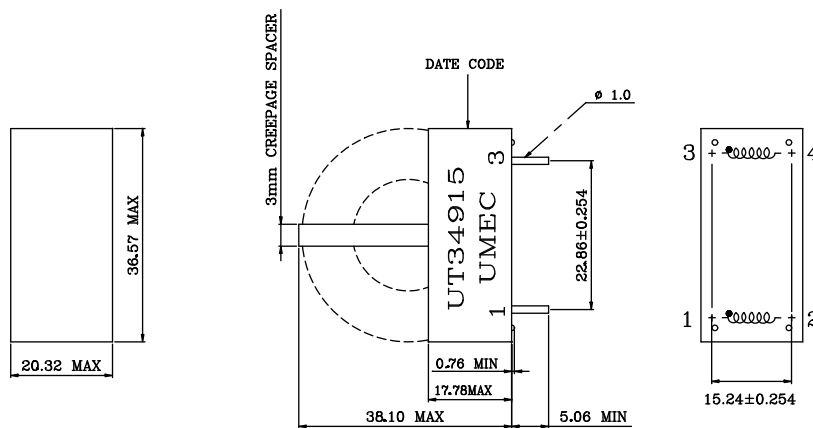

NOTE : specifications are subject to change without prior notice.

UNIT: mm

E10-007-B



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-3590096 FAX:886-4-3590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C