



DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	1/1
UT41679	TRANSFORMERS	A0	00/06

ELECTRICAL SPECIFICATIONS AT 25°C

1. IMPEDANCE : DESIGNED TO REFLECT 600OHMS ON PRI. WITH 600OHMS ON SEC.
2. TURNS RATIO : 1 : 1±5% , AT 15.75KHz 1V , PIN(1-2) : (4-3)
3. LEAKAGE INDUCTANCE : 1mH TYP. at 1KHz 1V , PIN(1-2) ; (4-3) SHORTED
4. D.C.R : 38Ω Max. , PIN(1-2)
5. D.C.R : 45Ω Max. , PIN(4-3)
6. RETURN LOSS : 20dB Min. , AT 200Hz ~ 4KHz
7. HI-POT : 3750Vrms/0.5mA/1min. PRI. TO SEC.
8. INSULATION RESISTANCE : 100MΩ Min. AT 500Vdc

DIMENSIONS & SCHEMATICS :

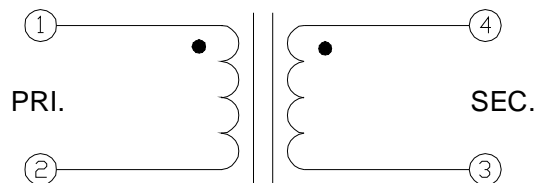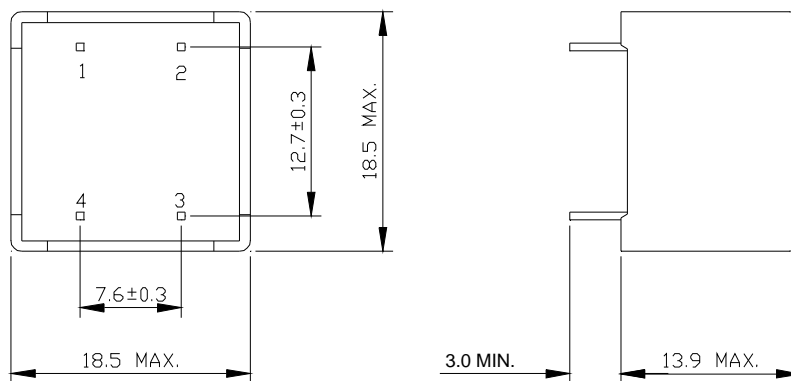

Note: Specifications are subject to change without prior notice.

UNIT: mm

