


DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT41680	TRANSFORMERS	A0	00/22

ELECTRICAL SPECIFICATIONS AT 25°C

- 1.TURNS RATIO : 1.1 : 1 AT 15.75KHz 1V , PIN(1-3):(6-4)
- 2.HARMONIC DISTORTION : 61dB TYP. AT 150Hz -10dBm
- 3.RETURN LOSS : 16dB Min. AT 200Hz ~ 4KHz (Ref. : 600Ω)
- 4.FREQUENCY RESPONSE : ±0.2dB Max. AT 200 ~ 4KHz ,1KHz 0dB REF.
- 5.BALANCE : 80dB Min. AT 4KHz
- 6.HI-POT : 4.0KVrms 0.5mA 2sec. PIN(1-6)

DIMENSIONS & SCHEMATICS

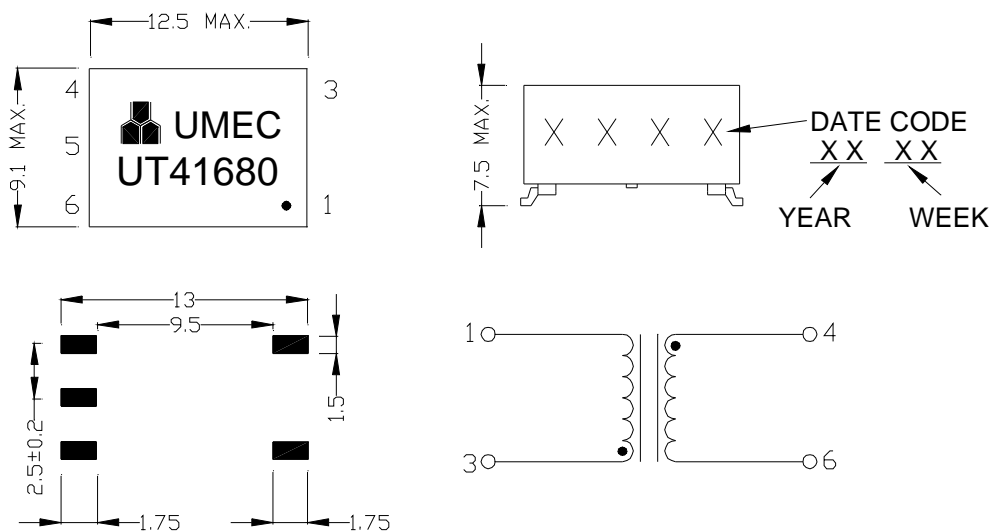

SUGGEST P.C.B. LAYOUT

Unit : mm

Note: Packaging information tape&reel
Specifications are subject to change without prior notice.



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C

E10-007-C