


HDSL

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT67929	HDSL Transformer for Brooktree BT8921/BT8970-784kbps	B3	2001/28

Electrical specification at 25 °C:

- 1.) Turns Ratio and Polarity : 2.0CS : 1 \pm 2% , Line side to Chip side .
- 2.) D.C.R : 2.5 Ω max. , PIN(1-5) ; PIN(4-2) shorted .
1.0 Ω max. , PIN(9-7) .
- 3.) Line side Inductance : 3.0mH \pm 6% , at 10KHz 1V, PIN(1-5) ; PIN(4-2) shorted .
- 4.) DC. Current : 160mA max .
- 5.) Leakage Inductance : 11uH max. , at 100KHz 100mV, PIN(1-5) ; PIN(4-2)&PIN(9-7) shorted.
- 6.) Insertion Loss : 0.4dB max. , at 200KHz .
- 7.) Frequency Response : \pm 0.1dB , 40KHz to 200KHz .
- 8.) Longitudinal Balance : 53dB min. , 40KHz to 200KHz .
- 9.) Return Loss : 20dB min. , 40KHz to 200KHz .
- 10.) Total Harmonic Distortion : -70dB max. , at 40KHz 14dBm .
- 11.) HI-pot test : 1500Vac 2s , Line side to Chip side .
- 12.) Operating Temperature : -40°C to 85°C .

Schematic diagram & Dimension:

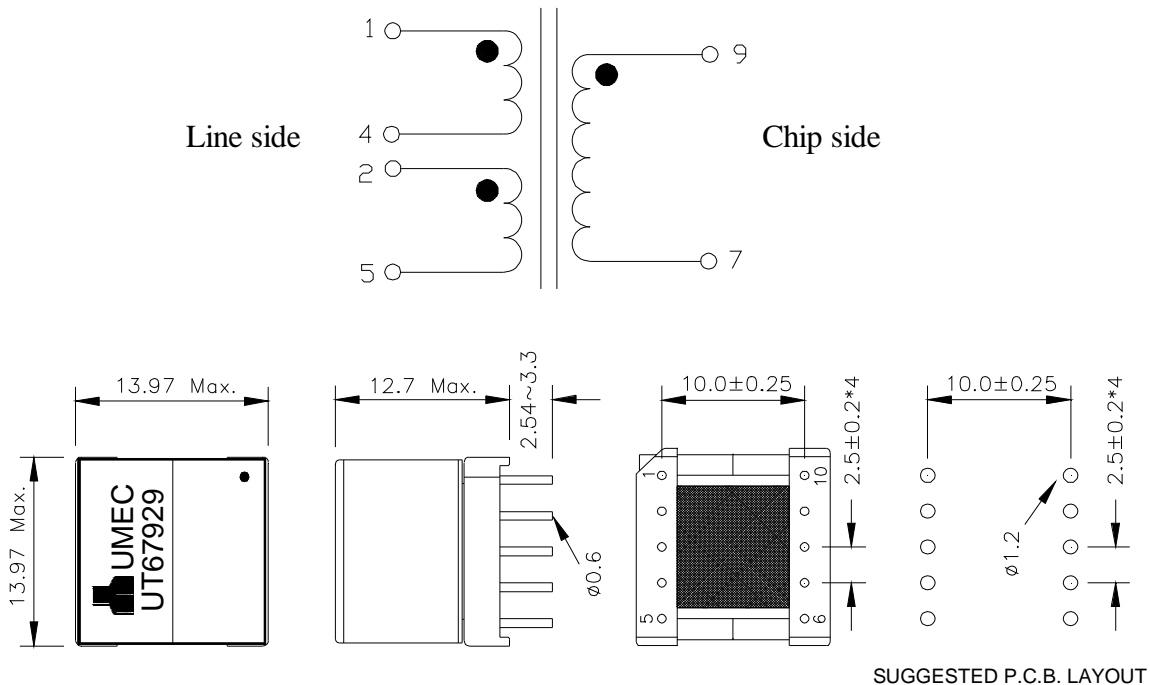

Note: Specifications are subject to change without prior notice.

UNIT : mm

Tolerances : \pm 0.2mm

E10-032-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C